

# ABDECKKAPPE MIT SPREIZBEFESTIGUNG



## Technische Beschreibung

**Material:** PA 6.6


**Farbe:** schwarz

**Entflammbarkeit:** V2 (UL 94)


**Temperaturbereich:** -30°C bis +85°C


Alle Maße sind in mm

TYPE 1

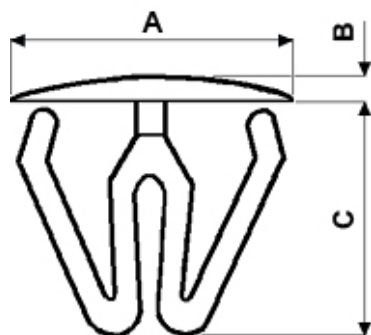

TYPE 2

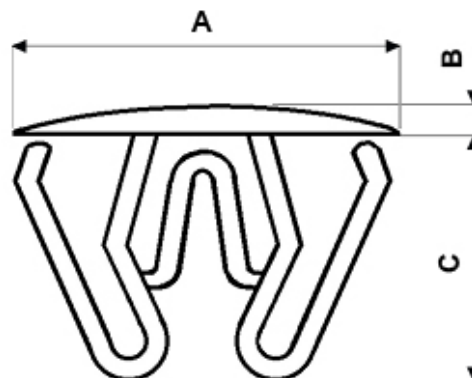

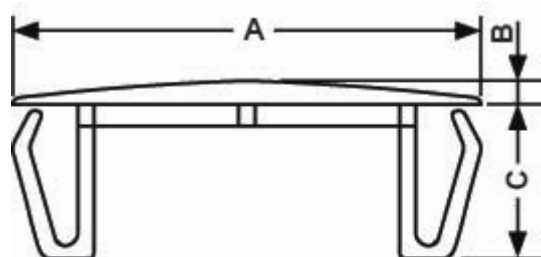

### TYPE 3

Artikel	A	B	C	Bohrung	Stärke	Material	Type	VPE-Stckz.
15962AA01	18,5	2,0	10,5	Ø 11,5 - 14,5	0,8 - 3,2	PA 66 V2(UL94)	3	1.000
15963AA01	21,5	2,0	10,0	Ø 15,0 - 18,0	0,8 - 3,2	PA 66 V2(UL94)	3	1.000
15990AA01	25,3	2,0	10,7	Ø 18,4 - 22,0	0,8 - 3,2	PA 66 V2(UL94)	3	1.000
16330AA01	16,0	2,0	11,2	Ø 9,5 - 13,0	0,8 - 3,2	PA 66 V2(UL94)	3	1.000
16382AA01	35,0	2,0	11,5	Ø 27,0 - 33,0	0,8 - 3,2	PA 66 V2(UL94)	3	1.000
25368AA01	32,5	2,0	11,7	Ø 22,0 - 27,0	0,8 - 3,2	PA 66 V2(UL94)	3	1.000
25370AA01	43,3	2,0	11,1	Ø 35,0 - 40,0	0,8 - 3,2	PA 66 V2(UL94)	3	1.000
25371AA01	52,5	2,0	11,7	Ø 44,5 - 49,0	0,8 - 3,2	PA 66 V2(UL94)	3	1.000
3584AA01	16,7	1,2	14,3	Ø 8,5 - 14,5	0,8 - 2,0	POM HB(UL94)	1	1.000
3585AA01	25,0	1,4	16,2	Ø 15,0 - 21,5	0,8 - 2,0	POM HB(UL94)	2	1.000
3586AA01	34,5	1,5	16,2	Ø 22,0 - 30,0	0,8 - 2,0	POM HB(UL94)	2	1.000