

ABSTANDBOLZEN MIT INNEN/INNENGEWINDE M2 UL94V2



Technische Beschreibung

Material: PA 6.6


Entflammbarkeit: V2 (UL 94)

Temperaturbereich: -35° ~ +85°C

Farbe: Natur

Auf Anfrage in Material PA 6.6 UL94V0 lieferbar

Alle Maße in mm

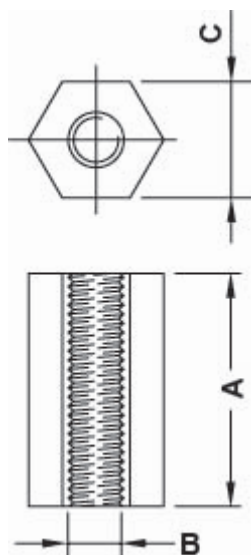

Artikel	A	B	C	VPE-Stckz.
11456AA0004.0	4,0	M2	4,0	1.000
11456AA0004.5	4,5	M2	4,0	1.000
11456AA0005.0	5,0	M2	4,0	1.000

Artikel	A	B	C	VPE-Stckz.
11456AA0006.0	6,0	M2	4,0	1.000
11456AA0007.0	7,0	M2	4,0	1.000
11456AA0008.0	8,0	M2	4,0	1.000
11456AA0009.0	9,0	M2	4,0	1.000
11456AA0010.0	10,0	M2	4,0	1.000
11456AA0011.0	11,0	M2	4,0	1.000
11456AA0012.0	12,0	M2	4,0	1.000
11456AA0012.7	12,7	M2	4,0	1.000
11456AA0013.0	13,0	M2	4,0	1.000
11456AA0014.0	14,0	M2	4,0	1.000
11456AA0015.0	15,0	M2	4,0	1.000
11456AA0016.0	16,0	M2	4,0	1.000
11456AA0017.0	17,0	M2	4,0	1.000
11456AA0018.0	18,0	M2	4,0	1.000
11456AA0019.0	19,0	M2	4,0	1.000
11456AA0020.0	20,0	M2	4,0	1.000
11456AA0021.0	21,0	M2	4,0	1.000
11456AA0022.0	22,0	M2	4,0	1.000
11456AA0023.0	23,0	M2	4,0	1.000
11456AA0024.0	24,0	M2	4,0	1.000
11456AA0025.0	25,0	M2	4,0	1.000