

# ABSTANDSHALTER Ø 4,0 / 4,0 MATERIALSTÄRKE 1,6 / 2,1 MM




## Technische Beschreibung

**Material:** PA 6.6

**Farbe:** schwarz

**Entflammbarkeit:** HB (UL 94)

**Temperaturbereich:** -35°C bis +130°C

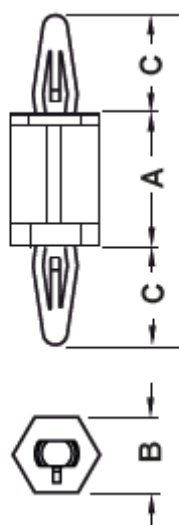

Artikel	A	B	C	Bohrung Oben	Obere Dicke	Bohrung Unten	Bodendicke	VPE-Stckz.
10050AA0103.0	4,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0104.0	4,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0105.0	5,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0106.0	6,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0107.0	7,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500

Artikel	A	B	C	Bohrung Oben	Obere Dicke	Bohrung Unten	Bodendicke	VPE-Stckz.
10050AA0108.0	8,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0109.0	9,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0110.0	10,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0111.0	11,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0112.0	12,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0113.0	13,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0114.0	14,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0115.0	15,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0116.0	16,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0117.0	17,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0118.0	18,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0119.0	19,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0120.0	20,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0121.0	21,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0122.0	22,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0123.0	23,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0124.0	24,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0125.0	25,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0126.0	26,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0127.0	27,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0128.0	28,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0129.0	29,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0130.0	30,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0131.0	31,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0132.0	32,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0133.0	33,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0134.0	34,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0135.0	35,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0136.0	36,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0137.0	37,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0138.0	38,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500

Artikel	A	B	C	Bohrung Oben	Obere Dicke	Bohrung Unten	Bodendicke	VPE-Stckz.
10050AA0139.0	39,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0140.0	40,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0141.0	41,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0142.0	42,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0143.0	43,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0144.0	44,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0145.0	45,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0146.0	46,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0147.0	47,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0148.0	48,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0149.0	49,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0150.0	50,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0151.0	51,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0152.0	52,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0153.0	53,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0154.0	54,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0155.0	55,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0156.0	56,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0157.0	57,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0158.0	58,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0159.0	59,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0160.0	60,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0161.0	61,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0162.0	62,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0163.0	63,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0164.0	64,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500
10050AA0165.0	65,0	8,0	9,4	Ø 4,0	1,6	Ø 4,0	2,1	500