

# ABSTANDSROLLEN



## Technische Beschreibung

**Material:** PA 6 , 25%GV

**Entflammbarkeit:** HB (UL 94)

**Farbe:** schwarz

**Temperaturbereich:** -35°C ~ +100°C

**Auf Anfrage :**


**Material:** Polystyrol

**Entflammbarkeit:** HB (UL 94)

**Farbe:** weiß

**Temperaturbereich:** -40°C ~ +70°C

Alle Maße sind in mm

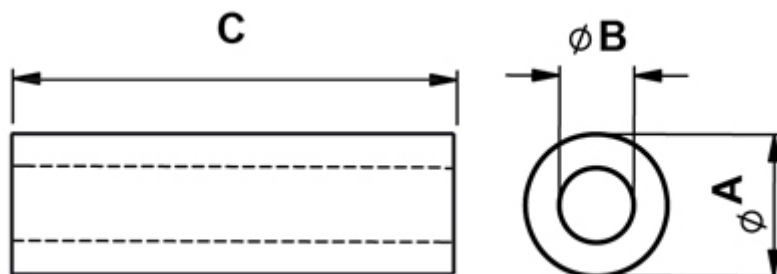

Artikel	A	B	C	VPE-Stckz.
10105BB0102.0	8,0	3,5	2,0	500
10105BB0103.0	8,0	3,5	3,0	500

Artikel	A	B	C	VPE-Stckz.
10105BB0104.0	8,0	3,5	4,0	500
10105BB0105.0	8,0	3,5	5,0	500
10105BB0106.0	8,0	3,5	6,0	500
10105BB0107.0	8,0	3,5	7,0	500
10105BB0108.0	8,0	3,5	8,0	500
10105BB0109.0	8,0	3,5	9,0	500
10105BB0110.0	8,0	3,5	10,0	500
10105BB0111.0	8,0	3,5	11,0	500
10105BB0112.0	8,0	3,5	12,0	500
10105BB0113.0	8,0	3,5	13,0	500
10105BB0114.0	8,0	3,5	14,0	500
10105BB0115.0	8,0	3,5	15,0	500
10105BB0116.0	8,0	3,5	16,0	500
10105BB0117.0	8,0	3,5	17,0	500
10105BB0118.0	8,0	3,5	18,0	500
10105BB0120.0	8,0	3,5	20,0	500
10105BB0121.0	8,0	3,5	21,0	500
10105BB0122.0	8,0	3,5	22,0	500
10105BB0123.0	8,0	3,5	23,0	500
10105BB0124.0	8,0	3,5	24,0	500
10105BB0125.0	8,0	3,5	25,0	500
10105BB0126.0	8,0	3,5	26,0	500
10105BB0127.0	8,0	3,5	27,0	500
10105BB0128.0	8,0	3,5	28,0	500
10105BB0129.0	8,0	3,5	29,0	500
10105BB0130.0	8,0	3,5	30,0	500
10105BB0131.0	8,0	3,5	31,0	500
10105BB0132.0	8,0	3,5	32,0	500
10105BB0133.0	8,0	3,5	33,0	500
10105BB0134.0	8,0	3,5	34,0	500
10105BB0135.0	8,0	3,5	35,0	500

Artikel	A	B	C	VPE-Stckz.
10105BB0136.0	8,0	3,5	36,0	500
10105BB0137.0	8,0	3,5	37,0	500
10105BB0138.0	8,0	3,5	38,0	500
10105BB0139.0	8,0	3,5	39,0	500
10105BB0140.0	8,0	3,5	40,0	500
10105BB0141.0	8,0	3,5	41,0	500
10105BB0142.0	8,0	3,5	42,0	500
10105BB0143.0	8,0	3,5	43,0	500
10105BB0144.0	8,0	3,5	44,0	500
10105BB0145.0	8,0	3,5	45,0	500
10105BB0146.0	8,0	3,5	46,0	500
10105BB0147.0	8,0	3,5	47,0	500
10105BB0148.0	8,0	3,5	48,0	500
10105BB0149.0	8,0	3,5	49,0	500
10105BB0150.0	8,0	3,5	50,0	500