

# ABSTANDSROLLEN



## Technische Beschreibung

**Material:** PA 6 , 25%GV

**Entflammbarkeit:** HB (UL 94)

**Farbe:** schwarz

**Temperaturbereich:** -35°C ~ +100°C

**Auf Anfrage :**


**Material:** Polystyrol

**Entflammbarkeit:** HB (UL 94)

**Farbe:** weiß

**Temperaturbereich:** -40°C ~ +70°C

Alle Maße sind in mm

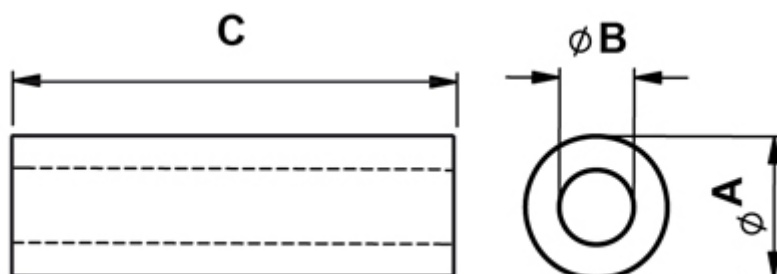

| Artikel       | A    | B   | C   | VPE-Stckz. |
|---------------|------|-----|-----|------------|
| 10136BB0102.0 | 20,0 | 5,2 | 2,0 | 500        |
| 10136BB0103.0 | 20,0 | 5,2 | 3,0 | 500        |

| Artikel       | A    | B   | C    | VPE-Stckz. |
|---------------|------|-----|------|------------|
| 10136BB0104.0 | 20,0 | 5,2 | 4,0  | 500        |
| 10136BB0105.0 | 20,0 | 5,2 | 5,0  | 500        |
| 10136BB0106.0 | 20,0 | 5,2 | 6,0  | 500        |
| 10136BB0107.0 | 20,0 | 5,2 | 7,0  | 500        |
| 10136BB0108.0 | 20,0 | 5,2 | 8,0  | 500        |
| 10136BB0109.0 | 20,0 | 5,2 | 9,0  | 500        |
| 10136BB0110.0 | 20,0 | 5,2 | 10,0 | 500        |
| 10136BB0111.0 | 20,0 | 5,2 | 11,0 | 500        |
| 10136BB0112.0 | 20,0 | 5,2 | 12,0 | 500        |
| 10136BB0113.0 | 20,0 | 5,2 | 13,0 | 500        |
| 10136BB0114.0 | 20,0 | 5,2 | 14,0 | 500        |
| 10136BB0115.0 | 20,0 | 5,2 | 15,0 | 500        |
| 10136BB0116.0 | 20,0 | 5,2 | 16,0 | 500        |
| 10136BB0117.0 | 20,0 | 5,2 | 17,0 | 500        |
| 10136BB0118.0 | 20,0 | 5,2 | 18,0 | 500        |
| 10136BB0119.0 | 20,0 | 5,2 | 19,0 | 500        |
| 10136BB0120.0 | 20,0 | 5,2 | 20,0 | 500        |