

ABSTANDSROLLEN



Technische Beschreibung

Material: PA 6 , 25%GV

Entflammbarkeit: HB (UL 94)

Farbe: schwarz

Temperaturbereich: -35°C ~ +100°C

Auf Anfrage :


Material: Polystyrol

Entflammbarkeit: HB (UL 94)

Farbe: weiß

Temperaturbereich: -40°C ~ +70°C

Alle Maße sind in mm

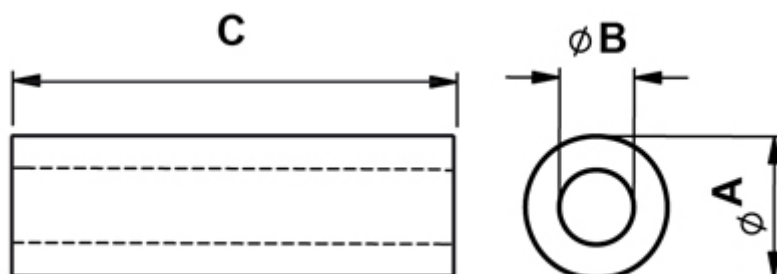

Artikel	A	B	C	VPE-Stckz.
10116BB0102.0	10,0	4,2	2,0	500
10116BB0103.0	10,0	4,2	3,0	500

Artikel	A	B	C	VPE-Stckz.
10116BB0104.0	10,0	4,2	4,0	500
10116BB0105.0	10,0	4,2	5,0	500
10116BB0106.0	10,0	4,2	6,0	500
10116BB0107.0	10,0	4,2	7,0	500
10116BB0108.0	10,0	4,2	8,0	500
10116BB0109.0	10,0	4,2	9,0	500
10116BB0110.0	10,0	4,2	10,0	500
10116BB0111.0	10,0	4,2	11,0	500
10116BB0112.0	10,0	4,2	12,0	500
10116BB0113.0	10,0	4,2	13,0	500
10116BB0114.0	10,0	4,2	14,0	500
10116BB0115.0	10,0	4,2	15,0	500
10116BB0116.0	10,0	4,2	16,0	500
10116BB0117.0	10,0	4,2	17,0	500
10116BB0118.0	10,0	4,2	18,0	500
10116BB0119.0	10,0	4,2	19,0	500
10116BB0120.0	10,0	4,2	20,0	500
10116BB0121.0	10,0	4,2	21,0	500
10116BB0122.0	10,0	4,2	22,0	500
10116BB0123.0	10,0	4,2	23,0	500
10116BB0124.0	10,0	4,2	24,0	500
10116BB0125.0	10,0	4,2	25,0	500
10116BB0126.0	10,0	4,2	26,0	500
10116BB0127.0	10,0	4,2	27,0	500
10116BB0128.0	10,0	4,2	28,0	500
10116BB0129.0	10,0	4,2	29,0	500
10116BB0130.0	10,0	4,2	30,0	500
10116BB0131.0	10,0	4,2	31,0	500
10116BB0132.0	10,0	4,2	32,0	500
10116BB0133.0	10,0	4,2	33,0	500
10116BB0134.0	10,0	4,2	34,0	500

Artikel	A	B	C	VPE-Stckz.
10116BB0135.0	10,0	4,2	35,0	500
10116BB0136.0	10,0	4,2	36,0	500
10116BB0137.0	10,0	4,2	37,0	500
10116BB0138.0	10,0	4,2	38,0	500
10116BB0139.0	10,0	4,2	39,0	500
10116BB0140.0	10,0	4,2	40,0	500