

ABSTANDSROLLEN



Technische Beschreibung

Material: PA 6 , 25%GV

Entflammbarkeit: HB (UL 94)

Farbe: schwarz

Temperaturbereich: -35°C ~ +100°C

Auf Anfrage :


Material: Polystyrol

Entflammbarkeit: HB (UL 94)

Farbe: weiß

Temperaturbereich: -40°C ~ +70°C

Alle Maße sind in mm

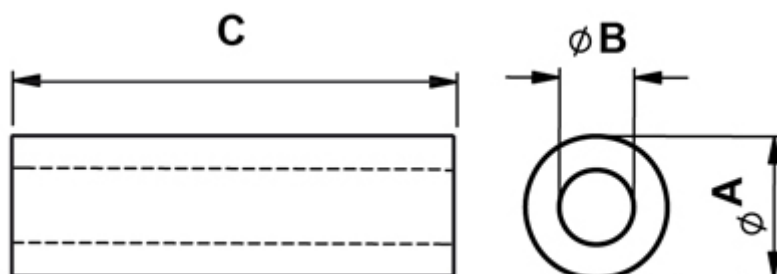

Artikel	A	B	C	VPE-Stckz.
10123BB0102.0	12,0	5,2	2,0	500
10123BB0103.0	12,0	5,2	3,0	500

Artikel	A	B	C	VPE-Stckz.
10123BB0104.0	12,0	5,2	4,0	500
10123BB0105.0	12,0	5,2	5,0	500
10123BB0106.0	12,0	5,2	6,0	500
10123BB0107.0	12,0	5,2	7,0	500
10123BB0108.0	12,0	5,2	8,0	500
10123BB0109.0	12,0	5,2	9,0	500
10123BB0110.0	12,0	5,2	10,0	500
10123BB0111.0	12,0	5,2	11,0	500
10123BB0112.0	12,0	5,2	12,0	500
10123BB0113.0	12,0	5,2	13,0	500
10123BB0114.0	12,0	5,2	14,0	500
10123BB0115.0	12,0	5,2	15,0	500
10123BB0116.0	12,0	5,2	16,0	500
10123BB0117.0	12,0	5,2	17,0	500
10123BB0118.0	12,0	5,2	18,0	500
10123BB0119.0	12,0	5,2	19,0	500
10123BB0120.0	12,0	5,2	20,0	500
10123BB0121.0	12,0	5,2	21,0	500
10123BB0122.0	12,0	5,2	22,0	500
10123BB0123.0	12,0	5,2	23,0	500
10123BB0124.0	12,0	5,2	24,0	500
10123BB0125.0	12,0	5,2	25,0	500
10123BB0126.0	12,0	5,2	26,0	500
10123BB0127.0	12,0	5,2	27,0	500
10123BB0128.0	12,0	5,2	28,0	500
10123BB0129.0	12,0	5,2	29,0	500
10123BB0130.0	12,0	5,2	30,0	500
10123BB0131.0	12,0	5,2	31,0	500
10123BB0132.0	12,0	5,2	32,0	500
10123BB0133.0	12,0	5,2	33,0	500
10123BB0134.0	12,0	5,2	34,0	500

Artikel	A	B	C	VPE-Stckz.
10123BB0135.0	12,0	5,2	35,0	500
10123BB0136.0	12,0	5,2	36,0	500
10123BB0137.0	12,0	5,2	37,0	500
10123BB0138.0	12,0	5,2	38,0	500
10123BB0139.0	12,0	5,2	39,0	500
10123BB0140.0	12,0	5,2	40,0	500
10123BB0141.0	12,0	5,2	41,0	500
10123BB0142.0	12,0	5,2	42,0	500
10123BB0143.0	12,0	5,2	43,0	500
10123BB0144.0	12,0	5,2	44,0	500
10123BB0145.0	12,0	5,2	45,0	500
10123BB0146.0	12,0	5,2	46,0	500
10123BB0147.0	12,0	5,2	47,0	500
10123BB0148.0	12,0	5,2	48,0	500
10123BB0149.0	12,0	5,2	49,0	500
10123BB0150.0	12,0	5,2	50,0	500
10123BB0151.0	12,0	5,2	51,0	500
10123BB0152.0	12,0	5,2	52,0	500
10123BB0153.0	12,0	5,2	53,0	500
10123BB0154.0	12,0	5,2	54,0	500
10123BB0155.0	12,0	5,2	55,0	500
10123BB0156.0	12,0	5,2	56,0	500
10123BB0157.0	12,0	5,2	57,0	500
10123BB0158.0	12,0	5,2	58,0	500