

# ABSTANDSROLLEN



## Technische Beschreibung

**Material:** PA 6 , 25%GV

**Entflammbarkeit:** HB (UL 94)

**Farbe:** schwarz

**Temperaturbereich:** -35°C ~ +100°C

**Auf Anfrage :**


**Material:** Polystyrol

**Entflammbarkeit:** HB (UL 94)

**Farbe:** weiß

**Temperaturbereich:** -40°C ~ +70°C

Alle Maße sind in mm

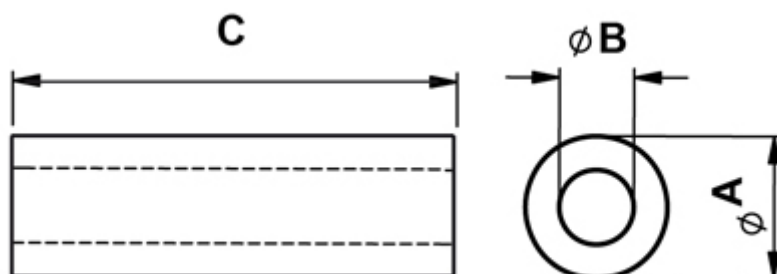

Artikel	A	B	C	VPE-Stckz.
10122BB0102.0	12,0	4,2	2,0	500
10122BB0103.0	12,0	4,2	3,0	500

Artikel	A	B	C	VPE-Stckz.
10122BB0104.0	12,0	4,2	4,0	500
10122BB0105.0	12,0	4,2	5,0	500
10122BB0106.0	12,0	4,2	6,0	500
10122BB0107.0	12,0	4,2	7,0	500
10122BB0108.0	12,0	4,2	8,0	500
10122BB0109.0	12,0	4,2	9,0	500
10122BB0110.0	12,0	4,2	10,0	500
10122BB0111.0	12,0	4,2	11,0	500
10122BB0112.0	12,0	4,2	12,0	500
10122BB0113.0	12,0	4,2	13,0	500
10122BB0114.0	12,0	4,2	14,0	500
10122BB0115.0	12,0	4,2	15,0	500
10122BB0116.0	12,0	4,2	16,0	500
10122BB0117.0	12,0	4,2	17,0	500
10122BB0118.0	12,0	4,2	18,0	500
10122BB0119.0	12,0	4,2	19,0	500
10122BB0120.0	12,0	4,2	20,0	500
10122BB0121.0	12,0	4,2	21,0	500
10122BB0122.0	12,0	4,2	22,0	500
10122BB0123.0	12,0	4,2	23,0	500
10122BB0124.0	12,0	4,2	24,0	500
10122BB0125.0	12,0	4,2	25,0	500
10122BB0126.0	12,0	4,2	26,0	500
10122BB0127.0	12,0	4,2	27,0	500
10122BB0128.0	12,0	4,2	28,0	500
10122BB0129.0	12,0	4,2	29,0	500
10122BB0130.0	12,0	4,2	30,0	500
10122BB0131.0	12,0	4,2	31,0	500
10122BB0132.0	12,0	4,2	32,0	500
10122BB0133.0	12,0	4,2	33,0	500
10122BB0134.0	12,0	4,2	34,0	500

Artikel	A	B	C	VPE-Stckz.
10122BB0135.0	12,0	4,2	35,0	500
10122BB0136.0	12,0	4,2	36,0	500
10122BB0137.0	12,0	4,2	37,0	500
10122BB0138.0	12,0	4,2	38,0	500
10122BB0139.0	12,0	4,2	39,0	500
10122BB0140.0	12,0	4,2	40,0	500
10122BB0141.0	12,0	4,2	41,0	500
10122BB0142.0	12,0	4,2	42,0	500
10122BB0143.0	12,0	4,2	43,0	500
10122BB0144.0	12,0	4,2	44,0	500
10122BB0145.0	12,0	4,2	45,0	500
10122BB0146.0	12,0	4,2	46,0	500
10122BB0147.0	12,0	4,2	47,0	500
10122BB0148.0	12,0	4,2	48,0	500
10122BB0149.0	12,0	4,2	49,0	500
10122BB0150.0	12,0	4,2	50,0	500
10122BB0151.0	12,0	4,2	51,0	500
10122BB0152.0	12,0	4,2	52,0	500
10122BB0153.0	12,0	4,2	53,0	500
10122BB0154.0	12,0	4,2	54,0	500
10122BB0155.0	12,0	4,2	55,0	500
10122BB0156.0	12,0	4,2	56,0	500
10122BB0157.0	12,0	4,2	57,0	500
10122BB0158.0	12,0	4,2	58,0	500