

ABSTANDSROLLEN AD 12,0 / ID 6,2



Technische Beschreibung

Material: PA 6 , 25%GV

Entflammbarkeit: HB (UL 94)

Farbe: schwarz

Temperaturbereich: -35°C ~ +100°C

Alternativ:


Material: Polystyrol

Entflammbarkeit: HB (UL 94)

Farbe: weiß

Temperaturbereich: -40°C ~ +70°C

Alle Maße sind in mm

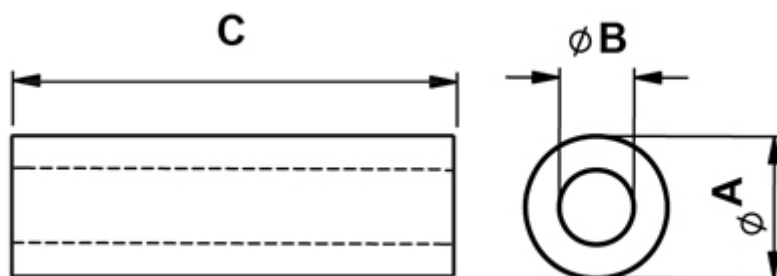

Artikel	A	B	C	VPE-Stckz.
10124BB0102.0	12,0	6,2	2,0	500
10124BB0103.0	12,0	6,2	3,0	500

Artikel	A	B	C	VPE-Stckz.
10124BB0104.0	12,0	6,2	4,0	500
10124BB0105.0	12,0	6,2	5,0	500
10124BB0106.0	12,0	6,2	6,0	500
10124BB0107.0	12,0	6,2	7,0	500
10124BB0108.0	12,0	6,2	8,0	500
10124BB0109.0	12,0	6,2	9,0	500
10124BB0110.0	12,0	6,2	10,0	500
10124BB0111.0	12,0	6,2	11,0	500
10124BB0112.0	12,0	6,2	12,0	500
10124BB0113.0	12,0	6,2	13,0	500
10124BB0114.0	12,0	6,2	14,0	500
10124BB0115.0	12,0	6,2	15,0	500
10124BB0116.0	12,0	6,2	16,0	500
10124BB0117.0	12,0	6,2	17,0	500
10124BB0118.0	12,0	6,2	18,0	500
10124BB0119.0	12,0	6,2	19,0	500
10124BB0120.0	12,0	6,2	20,0	500
10124BB0121.0	12,0	6,2	21,0	500
10124BB0122.0	12,0	6,2	22,0	500
10124BB0123.0	12,0	6,2	23,0	500
10124BB0124.0	12,0	6,2	24,0	500
10124BB0125.0	12,0	6,2	25,0	500
10124BB0126.0	12,0	6,2	26,0	500
10124BB0127.0	12,0	6,2	27,0	500
10124BB0128.0	12,0	6,2	28,0	500
10124BB0129.0	12,0	6,2	29,0	500
10124BB0130.0	12,0	6,2	30,0	500
10124BB0131.0	12,0	6,2	31,0	500
10124BB0132.0	12,0	6,2	32,0	500
10124BB0133.0	12,0	6,2	33,0	500
10124BB0134.0	12,0	6,2	34,0	500

Artikel	A	B	C	VPE-Stckz.
10124BB0135.0	12,0	6,2	35,0	500
10124BB0136.0	12,0	6,2	36,0	500
10124BB0137.0	12,0	6,2	37,0	500
10124BB0138.0	12,0	6,2	38,0	500
10124BB0139.0	12,0	6,2	39,0	500
10124BB0140.0	12,0	6,2	40,0	500
10124BB0141.0	12,0	6,2	41,0	500
10124BB0142.0	12,0	6,2	42,0	500
10124BB0143.0	12,0	6,2	43,0	500
10124BB0144.0	12,0	6,2	44,0	500
10124BB0145.0	12,0	6,2	45,0	500
10124BB0146.0	12,0	6,2	46,0	500
10124BB0147.0	12,0	6,2	47,0	500
10124BB0148.0	12,0	6,2	48,0	500
10124BB0149.0	12,0	6,2	49,0	500
10124BB0150.0	12,0	6,2	50,0	500
10124BB0151.0	12,0	6,2	51,0	500
10124BB0152.0	12,0	6,2	52,0	500
10124BB0153.0	12,0	6,2	53,0	500
10124BB0154.0	12,0	6,2	54,0	500
10124BB0155.0	12,0	6,2	55,0	500
10124BB0156.0	12,0	6,2	56,0	500
10124BB0157.0	12,0	6,2	57,0	500
10124BB0158.0	12,0	6,2	58,0	500
10124BB0159.0	12,0	6,2	59,0	500
10124BB0160.0	12,0	6,2	60,0	500
10124BB0161.0	12,0	6,2	61,0	500
10124BB0162.0	12,0	6,2	62,0	500
10124BB0163.0	12,0	6,2	63,0	500
10124BB0164.0	12,0	6,2	64,0	500
10124BB0165.0	12,0	6,2	65,0	500