

# GETEILTER RAHMEN FÜR KABEL UND LEITUNGEN MIT UND OHNE STECKER



## Technische Beschreibung


**Material:** PP + GF

**Entflammbarkeit:** V0 (UL94)

**Temperaturbereich:** -40°C ~ +155°C

**Farbe:** Schwarz

*\*Alle Maße in mm*

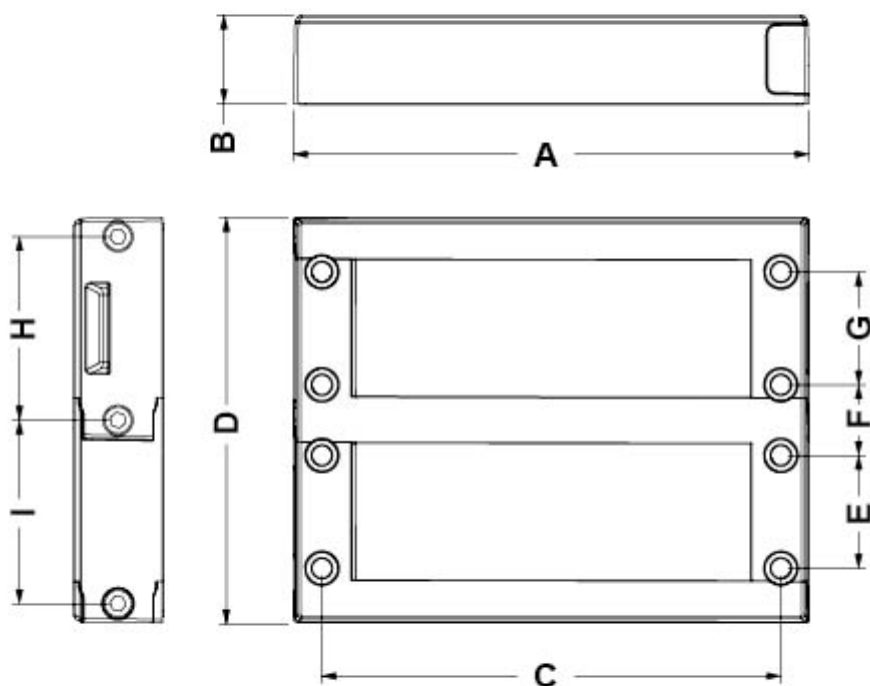

Artikel	A	B	C	D	E	F	G	H	I	Bohrung	VPE-Stckz.
17859FG01	146,0	25,0	130,0	114,0	32,0	20,0	32,0	52,0	52,0	114,0 x 92,0	1
17860FG01	146,0	25,0	130,0	166,0	32,0	20,0	32,0	52,0	52,0	114,0 x 144,0	1
17861FG01	146,0	25,0	130,0	218,0	32,0	20,0	32,0	52,0	52,0	114,0 x 196,0	1
17862FG01	146,0	25,0	130,0	270,0	32,0	20,0	32,0	52,0	52,0	114,0 x 248,0	1

Artikel	A	B	C	D	E	F	G	H	I	Bohrung	VPE-Stckz.
18937FG01	146,0	25,0	130,0	582,0	32,0	20,0	32,0	52,0	52,0	114,0 x 560,0	1
18938FG01	146,0	25,0	130,0	322,0	32,0	20,0	32,0	52,0	52,0	114,0 x 300,0	1
18939FG01	146,0	25,0	130,0	374,0	32,0	20,0	32,0	52,0	52,0	114,0 x 352,0	1
18940FG01	146,0	25,0	130,0	426,0	32,0	20,0	32,0	52,0	52,0	114,0 x 404,0	1
18941FG01	146,0	25,0	130,0	478,0	32,0	20,0	32,0	52,0	52,0	114,0 x 456,0	1
18942FG01	146,0	25,0	130,0	530,0	32,0	20,0	32,0	52,0	52,0	114,0 x 508,0	1