

KABELBINDER MIT SCHRAUBÖSE



Technische Beschreibung


Material: PA 6.6

Entflammbarkeit: V2 (UL 94)

Temperaturbereich: -35°C bis +85°C

Farbe: Natur

*Alle Maße in mm

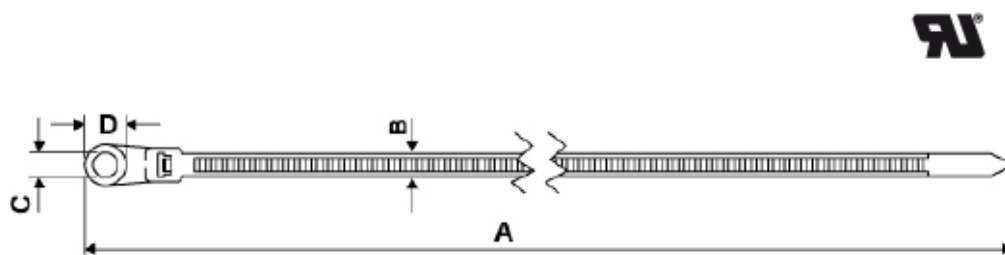

Artikel	A	B	C	D	Max Kabel	Mindestlast (kg)	VPE-Stckz.
2436AA00	150,0	3,6	4,8	8,0	32,0	18,2	1.000
2437AA00	200,0	4,8	5,5	9,6	50,0	22,2	1.000
2438AA00	215,0	7,6	5,7	11,5	50,0	54,4	100
2439AA00	375,0	7,6	6,3	11,5	98,0	54,4	100
4771AA00	110,0	2,5	3,2	6,2	22,0	8,1	1.000
4772AA00	310,0	4,8	5,5	9,8	76,0	22,2	1.000