

KABELBINDER MIT STECKFUSS



Technische Beschreibung


Material: PA6.6

Entflammbarkeit: V2 (UL94)

Temperaturbereich : -35°C ~ +85°C

Farbe: Natur

*Alle Maße in mm

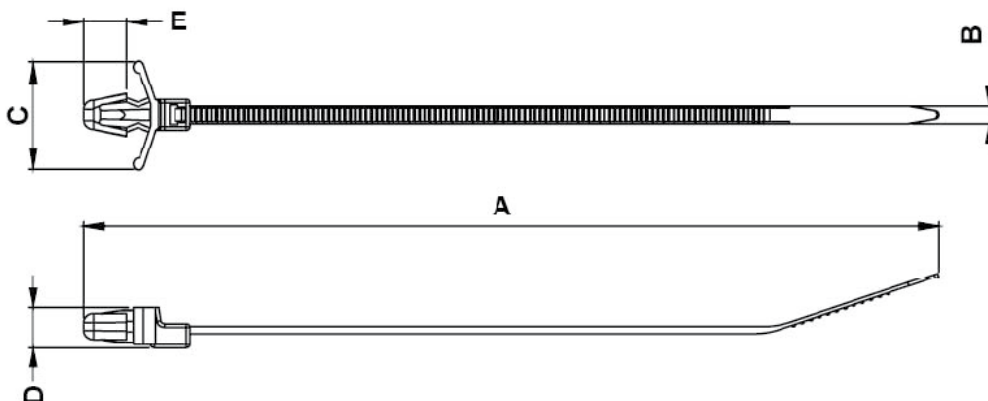

Artikel	A	B	C	D	E	Bohrung	Stärke	Max Kabel	Mindestlast (kg)	VPE-Stckz.
4773AA00	132,0	4,8	17,5	9,3	8,0	Ø 6,4	1,0 - 3,2	25,0	22,2	1.000
4775AA00	170,0	4,8	17,5	9,3	8,0	Ø 6,4	1,0 - 3,2	38,0	22,2	1.000
4776AA00	200,0	4,8	17,5	9,3	8,0	Ø 6,4	1,0 - 3,2	45,0	22,2	1.000
4778AA00	110,0	2,5	13,3	6,0	6,0	Ø 4,8	1,0 - 2,4	22,0	8,1	1.000

Artikel	A	B	C	D	E	Bohrung	Stärke	Max Kabel	Mindestlast (kg)	VPE-Stckz.
4779AA00	130,0	3,2	10,2	6,3	5,0	Ø 4,0	1,0 - 2,0	28,0	13,6	1.000