

# KABELDURCHFÜHRUNGSPLATTE FÜR NICHT VORKONFEKTIONIERTER KABEL



## Technische Beschreibung


**Material:** TPE

**Farbe:** siehe Tabelle

**Entflammbarkeit:** V0 (UL94)

**Temperaturbereich:** -40°C ~ +105°C

**Alle Maße sind in mm**

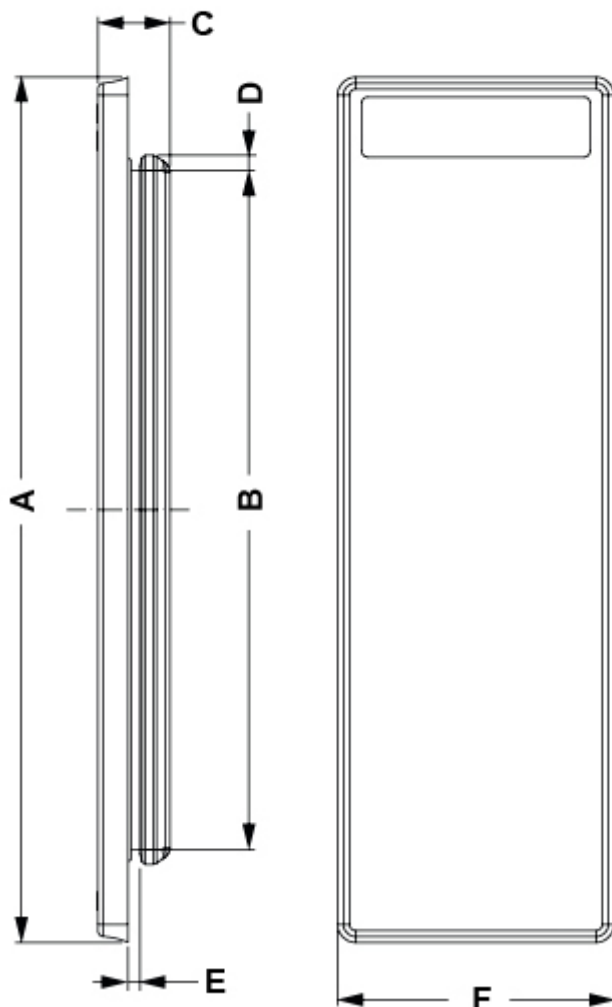

Artikel	A	B	C	D	E	F	ANZ. BOHRUNGEN Ø KABEL	Stärke	Bohrung	VPE-Stckz.
16200PS11	144,0	113,0	12,0	2,5	1,5	46,0	12xØ15,2	1,5-2,5	112,0x36,0	10
16201PS11	144,0	113,0	12,0	2,5	1,5	46,0	14 x Ø12,3	1,5-2,5	112,0x36,0	10
16202PS11	144,0	113,0	12,0	2,5	1,5	46,0	12 x Ø12,8 / 5 x Ø10,7	1,5-2,5	112,0x36,0	10
16203PS11	144,0	113,0	12,0	2,5	1,5	46,0	4 x Ø6,7 / 5 x Ø10,7 / 5 x Ø12,8	1,5-2,5	112,0x36,0	10
16204PS11	144,0	113,0	12,0	2,5	1,5	46,0	13 x Ø6,7 / 7 x Ø12,3	1,5-2,5	112,0x36,0	10

Artikel	A	B	C	D	E	F	ANZ. BOHRUNGEN Ø KABEL	Stärke	Bohrung	VPE-Stckz.
16205PS11	144,0	113,0	12,0	2,5	1,5	46,0	4 x Ø16,3 / 4 x Ø12,3 / 16 x Ø6,7	1,5-2,5	112,0x36,0	10
16206PS11	144,0	113,0	12,0	2,5	1,5	46,0	12 x Ø5,2 / 1 x Ø4,9 / 17 x Ø6,6 / 12 x Ø7,4	1,5-2,5	112,0x36,0	10
16207PS11	144,0	113,0	12,0	2,5	1,5	46,0	48 x Ø6,7	1,5-2,5	112,0x36,0	10
16208PS11	144,0	113,0	12,0	2,5	1,5	46,0	33 x Ø5,5 / 9 x Ø6,6 / 8 x Ø8,5	1,5-2,5	112,0x36,0	10