

KABELDURCHFÜHRUNGSPLATTE FÜR NICHT VORKONFEKTIONIERTER KABEL



Technische Beschreibung


Material: TPE

Entflammbarkeit: V0 (UL94)

Betriebstemperatur: -40° ~ +105° C

Farbe: Siehe Tabelle

Alle Maße in mm

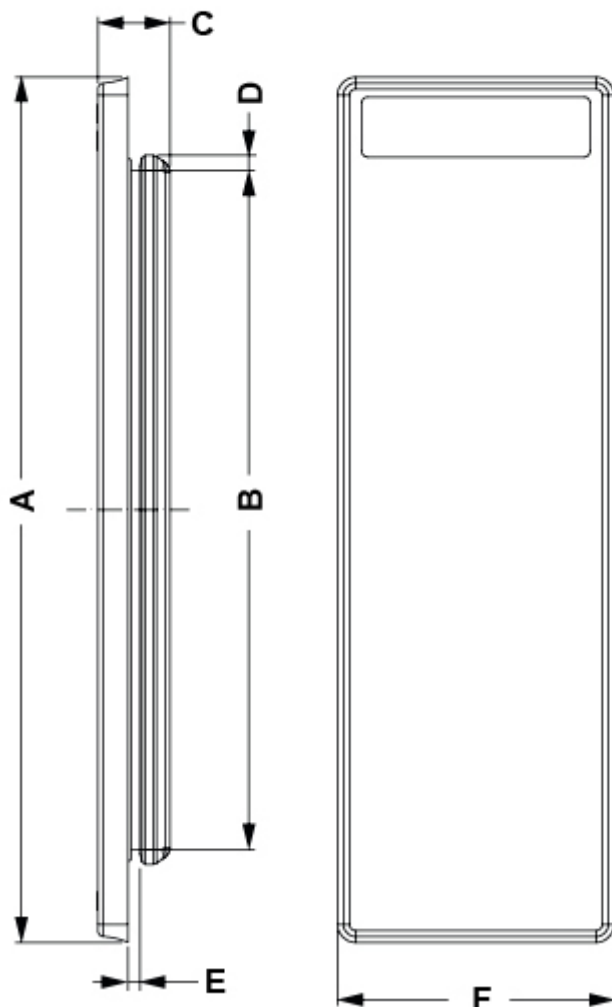

Artikel	A	B	C	D	E	F	ANZ. BOHRUNGEN Ø KABEL	Stärke	Bohrung	VPE-Stckz.
16214PS01	144,0	113,0	12,0	2,5	1,5	46,0	12xØ15,2	1,5-2,5	112,0x36,0	10
16215PS01	144,0	113,0	12,0	2,5	1,5	46,0	14 x Ø12,3	1,5-2,5	112,0x36,0	10
16216PS01	144,0	113,0	12,0	2,5	1,5	46,0	12 x Ø12,8 / 5 x Ø10,7	1,5-2,5	112,0x36,0	10
16217PS01	144,0	113,0	12,0	2,5	1,5	46,0	4 x Ø6,7 / 5 x Ø10,7 / 5 x Ø12,8	1,5-2,5	112,0x36,0	10
16218PS01	144,0	113,0	12,0	2,5	1,5	46,0	13 x Ø6,7 / 7 x Ø12,3	1,5-2,5	112,0x36,0	10

Artikel	A	B	C	D	E	F	ANZ. BOHRUNGEN Ø KABEL	Stärke	Bohrung	VPE-Stckz.
16219PS01	144,0	113,0	12,0	2,5	1,5	46,0	4 x Ø16,3 / 4 x Ø12,3 / 16 x Ø6,7	1,5-2,5	112,0x36,0	10
16220PS01	144,0	113,0	12,0	2,5	1,5	46,0	12 x Ø5,2 / 1 x Ø4,9 / 17 x Ø6,6 / 12 x Ø7,4	1,5-2,5	112,0x36,0	10
16221PS01	144,0	113,0	12,0	2,5	1,5	46,0	48 x Ø6,7	1,5-2,5	112,0x36,0	10
16222PS01	144,0	113,0	12,0	2,5	1,5	46,0	33 x Ø5,5 / 9 x Ø6,6 / 8 x Ø8,5	1,5-2,5	112,0x36,0	10