


# KABELHALTER SELBSTKLEBEND SEITLICHE EINFÜHRUNG

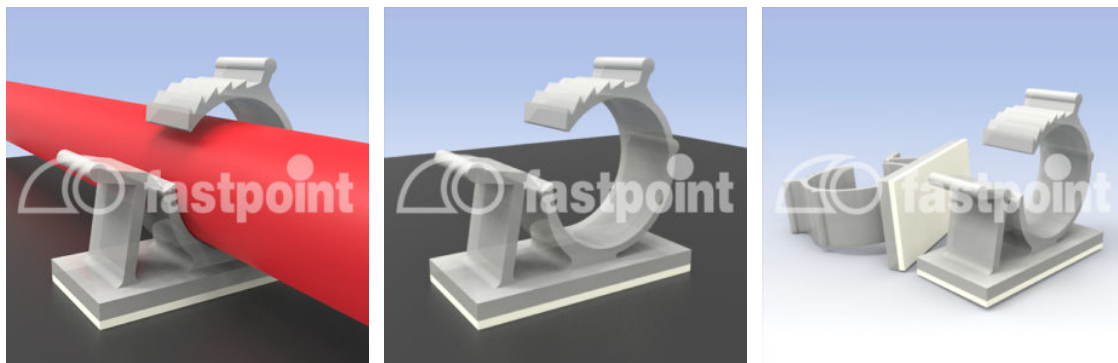

## Technische Beschreibung

**Material:** PA 6.6

**Entflammbarkeit:** V2 (UL 94)


**Temperaturbereich:**

- **PA 6.6:** -35° ~ +85°C

- **3M Klebeband:** Geschlossener PE Schaum, Klebstoff - Acrylat (-20°C ~ +80°C)

**Farbe:** Natur

Alle Maße in mm

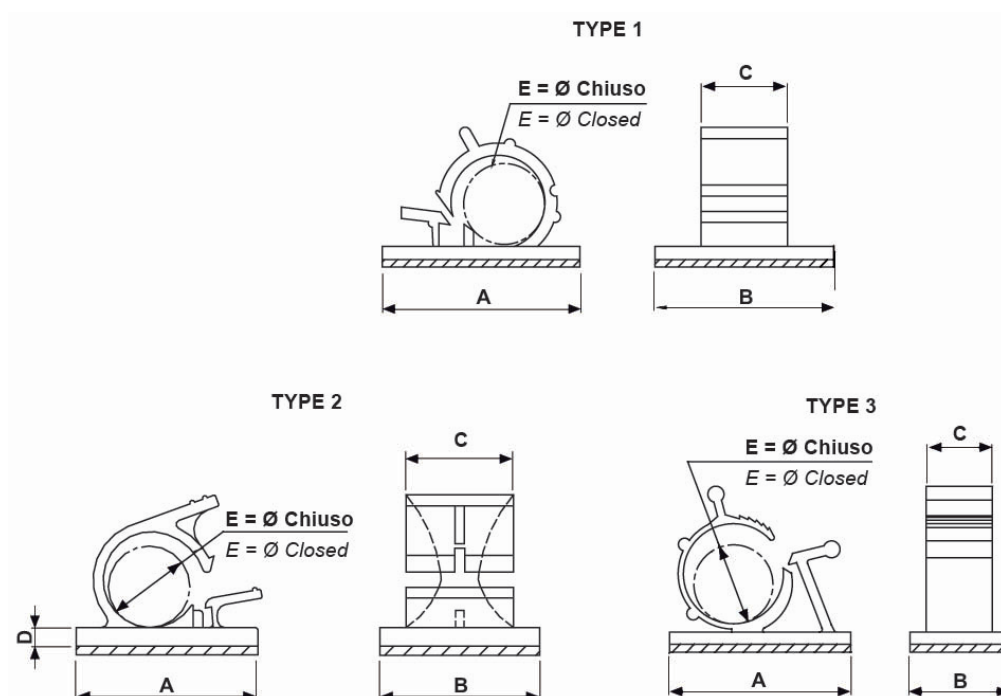

| Artikel    | A    | B    | C    | D | E      | Type | VPE-Stckz. |
|------------|------|------|------|---|--------|------|------------|
| 4755AA00AS | 21,5 | 17,0 | 12,0 | - | 9 - 12 | 1    | 1.000      |

| Artikel    | A    | B    | C    | D   | E           | Type | VPE-Stckz. |
|------------|------|------|------|-----|-------------|------|------------|
| 6398AA00AS | 13,0 | 10,0 | 6,8  | 2,0 | 4,0         | 2    | 1.000      |
| 6399AA00AS | 15,0 | 13,0 | 9,0  | 2,0 | 6,0         | 2    | 1.000      |
| 6400AA00AS | 21,6 | 19,0 | 12,8 | 2,2 | 9,0         | 2    | 1.000      |
| 6401AA00AS | 25,0 | 20,0 | 13,2 | 2,2 | 11,0        | 2    | 500        |
| 6402AA00AS | 32,0 | 25,4 | 16,0 | 2,1 | 13,4        | 2    | 250        |
| 6403AA00AS | 35,8 | 24,8 | 16,8 | 2,7 | 18,0        | 2    | 100        |
| 6404AA00AS | 56,1 | 50,0 | 20,1 | 2,7 | 25,4        | 2    | 50         |
| 6405AA00AS | 24,8 | 18,8 | 10,2 | -   | 7,9 - 10,3  | 3    | 250        |
| 6406AA00AS | 25,4 | 15,0 | 10,0 | -   | 11,0 - 13,3 | 3    | 250        |
| 6407AA00AS | 30,2 | 15,0 | 10,0 | -   | 11,9 - 14,3 | 3    | 250        |
| 6408AA00AS | 34,4 | 18,8 | 12,7 | -   | 14,7 - 19,1 | 3    | 100        |
| 6409AA00AS | 36,0 | 19,0 | 12,7 | -   | 18,0 - 22,0 | 3    | 100        |
| 6410AA00AS | 39,8 | 19,8 | 13,0 | -   | 22,0 - 26,5 | 3    | 100        |