

# GERADER LICHTLEITER FÜR FRONTPLATTEN BOHRUNG Ø5,0



## Technische Beschreibung


**Material:** PC

**Entflammbarkeit:** UL94-V0

**Temperaturbereich:** -40°C ~ +115°C

**Farbe:** Transparent

\*Alle Maße in mm

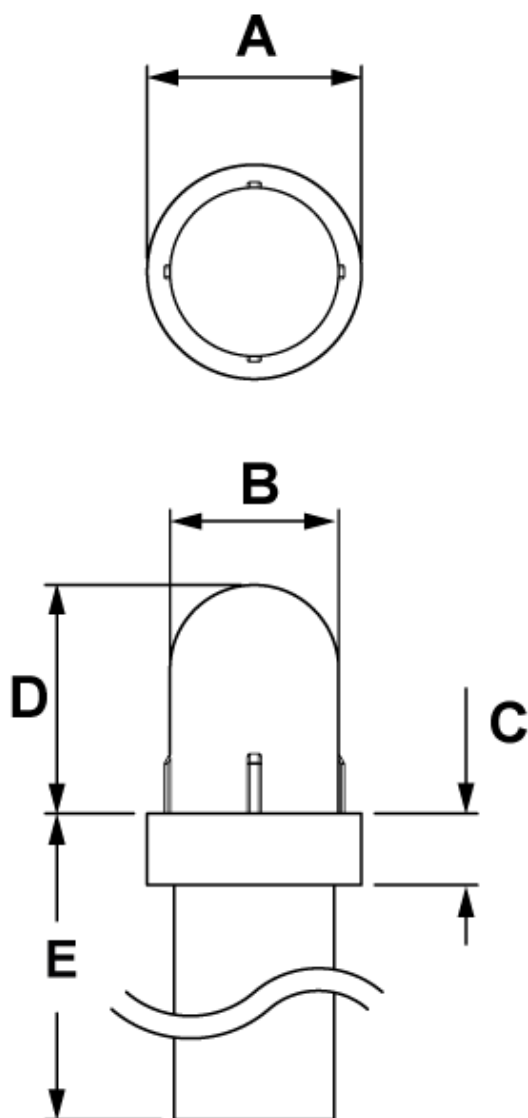

Artikel	A	B	C	D	E	Bohrung	VPE-Stckz.
17973NV00	Ø 5,8	Ø 5,0	1,0	4,8	4,2	Ø 5,0	2.000
17974NV00	Ø 5,8	Ø 5,0	1,0	4,8	7,4	Ø 5,0	2.000
17975NV00	Ø 5,8	Ø 5,0	1,0	4,8	9,9	Ø 5,0	2.000
17976NV00	Ø 5,8	Ø 5,0	1,0	4,8	10,5	Ø 5,0	2.000
17977NV00	Ø 5,8	Ø 5,0	1,0	4,8	13,7	Ø 5,0	2.000
17978NV00	Ø 5,8	Ø 5,0	1,0	4,8	16,9	Ø 5,0	2.000
17979NV00	Ø 5,8	Ø 5,0	1,0	4,8	20,0	Ø 5,0	2.000
17980NV00	Ø 5,8	Ø 5,0	1,0	4,8	26,4	Ø 5,0	1.000
17981NV00	Ø 5,8	Ø 5,0	1,0	7,1	30,3	Ø 5,0	1.000
17982NV00	Ø 5,8	Ø 5,0	1,0	4,8	30,3	Ø 5,0	1.000
17983NV00	Ø 5,8	Ø 5,0	1,0	4,8	39,1	Ø 5,0	1.000