

GERADER LICHTLEITER FÜR FRONTPLATTEN BOHRUNG Ø2,9



Technische Beschreibung


Material: PC

Entflammbarkeit: UL94-V0

Temperaturbereich: -40°C ~ +115°C

Farbe: Transparent

*Alle Maße in mm

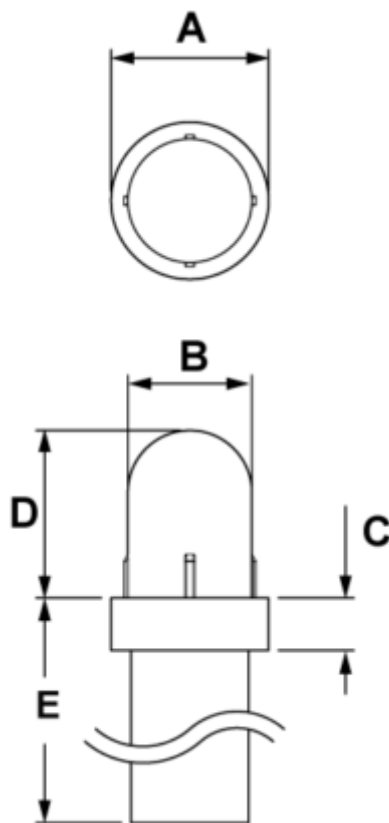

Artikel	A	B	C	D	E	Bohrung	VPE-Stckz.
17963NV00	Ø 3,8	Ø 3,0	1,27	4,06	3,2	Ø 2,84	2.000
17964NV00	Ø 3,8	Ø 3,0	1,27	4,06	6,0	Ø 2,84	2.000
17965NV00	Ø 3,8	Ø 3,0	1,27	4,06	6,4	Ø 2,84	2.000
17966NV00	Ø 3,8	Ø 3,0	1,27	4,06	8,9	Ø 2,84	2.000
17967NV00	Ø 3,8	Ø 3,0	1,27	4,06	9,5	Ø 2,84	1.000
17968NV00	Ø 3,8	Ø 3,0	1,27	4,06	11,7	Ø 2,84	1.000
17969NV00	Ø 3,8	Ø 3,0	1,27	4,06	12,7	Ø 2,84	1.000
17970NV00	Ø 3,8	Ø 3,0	1,27	4,06	15,9	Ø 2,84	1.000
17971NV00	Ø 3,8	Ø 3,0	1,27	4,06	19,0	Ø 2,84	1.000
17972NV00	Ø 3,8	Ø 3,0	1,27	4,06	21,0	Ø 2,84	1.000