

# LINSENKOPFSCHRAUBE MIT KREUZSCHLITZ DIN966



## Technische Beschreibung


**Material:** PA 6

**Temperaturbereich:** -30°C bis + max 100°C

**ähnlich DIN EN ISO 966**

**Farbe:** Natur

\*Alle Maße in mm

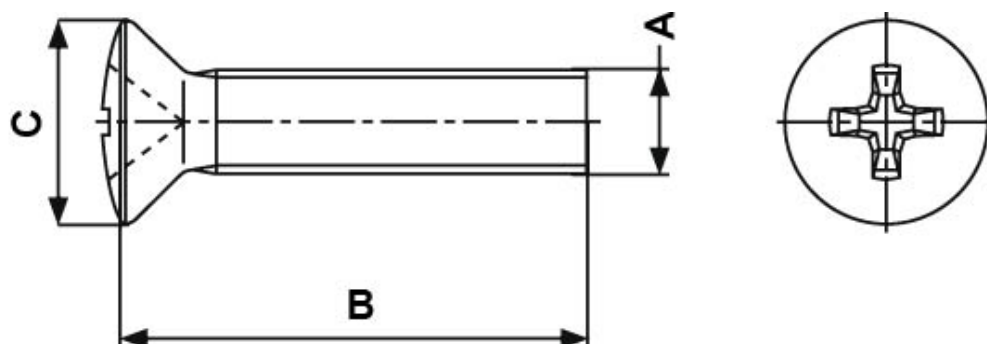

Artikel	A	B	C	VPE-Stckz.
10379AA0004.0	M 4	4,0	7,5	1.000
10379AA0006.0	M 4	6,0	7,5	1.000
10379AA0008.0	M 4	8,0	7,5	1.000
10379AA0010.0	M 4	10,0	7,5	1.000
10379AA0012.0	M 4	12,0	7,5	1.000
10379AA0014.0	M 4	14,0	7,5	1.000
10379AA0016.0	M 4	16,0	7,5	1.000
10379AA0018.0	M 4	18,0	7,5	1.000
10379AA0020.0	M 4	20,0	7,5	1.000

Artikel	A	B	C	VPE-Stckz.
10379AA0022.0	M 4	22,0	7,5	1.000
10379AA0025.0	M 4	25,0	7,5	1.000
10379AA0027.0	M 4	27,0	7,5	1.000
10379AA0030.0	M 4	30,0	7,5	1.000
10380AA0007.0	M 5	7,0	9,2	1.000
10380AA0008.0	M 5	8,0	9,2	1.000
10380AA0010.0	M 5	10,0	9,2	1.000
10380AA0012.0	M 5	12,0	9,2	1.000
10380AA0014.0	M 5	14,0	9,2	1.000
10380AA0016.0	M 5	16,0	9,2	1.000
10380AA0018.0	M 5	18,0	9,2	1.000
10380AA0020.0	M 5	20,0	9,2	1.000
10380AA0022.0	M 5	22,0	9,2	1.000
10380AA0025.0	M 5	25,0	9,2	1.000
10380AA0030.0	M 5	30,0	9,2	1.000
10380AA0035.0	M 5	35,0	9,2	1.000
10380AA0040.0	M 5	40,0	9,2	1.000
10381AA0008.0	M 6	8,0	11,0	1.000
10381AA0010.0	M 6	10,0	11,0	1.000
10381AA0012.0	M 6	12,0	11,0	1.000
10381AA0015.0	M 6	15,0	11,0	1.000
10381AA0020.0	M 6	20,0	11,0	1.000
10381AA0022.0	M 6	22,0	11,0	1.000
10381AA0025.0	M 6	25,0	11,0	1.000
10381AA0030.0	M 6	30,0	11,0	1.000
10381AA0035.0	M 6	35,0	11,0	1.000
10381AA0040.0	M 6	40,0	11,0	1.000
10381AA0045.0	M 6	45,0	11,0	1.000