

BLANKING PLUG FOR CABLE GLAND



Technical description

Material: PA 6 30% GF

Working temperature:


-30°C ~ +100° C

UL Flammability : HB (UL94)

Colour: See table

Colour: RAL 7001 available by special request

All dimensions are in mm.

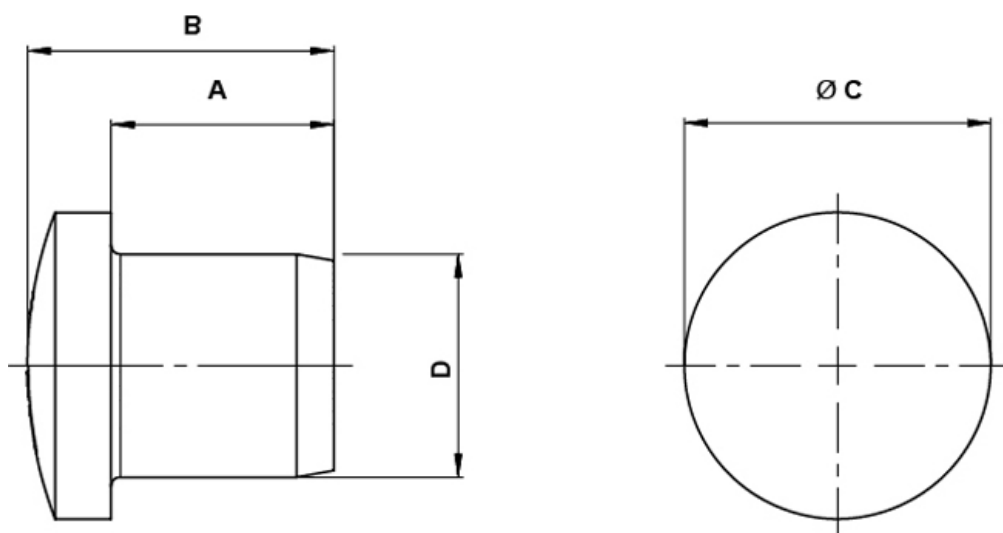

Code	A	B	C	D	Colour	Dimensioni	MOQ-Pcs
8889BB019005	9,0	12,5	10,0	5,5	RAL 9005	M12	50
8889BB117035	9,0	12,5	10,0	5,5	RAL 7035	M12	50
8890BB019005	12,0	16,0	13,5	9,5	RAL 9005	M16	50

Code	A	B	C	D	Colour	Dimensioni	MOQ-Pcs
8890BB117035	12,0	16,0	13,5	9,5	RAL 7035	M16	50
8891BB019005	12,0	16,5	16,5	12,0	RAL 9005	M20	50
8891BB117035	12,0	16,5	16,5	12,0	RAL 7035	M20	50
8892BB019005	15,0	19,5	20,5	16,0	RAL 9005	M25	50
8892BB117035	15,0	19,5	20,5	16,0	RAL 7035	M25	50
8893BB117035	17,0	21,5	24,5	20,0	RAL 7035	M32	25
8894BB117035	20,0	24,0	32,0	27,0	RAL 7035	M40	10
8895BB117035	25,0	29,0	39,0	35,0	RAL 7035	M50	5
8896BB117035	25,0	29,0	52,0	42,0	RAL 7035	M63	5