


COUNTERSUNK HEAD SCREW WITH SLIT DIN EN ISO 2009 (EX DIN 963)

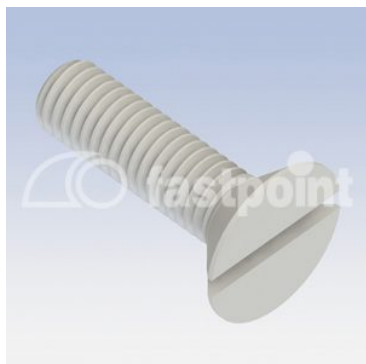

Technical description

Material: PA 6

Colour : Natural

Estimate according:


DIN EN ISO 2009 (EX DIN 963)

Operating temperature:

-30° C. ~ + max 100° C

All dimensions are in mm.

Intermediated thread lengths upon request

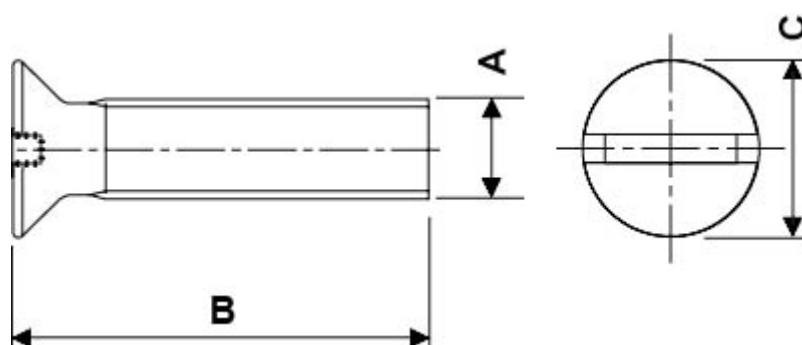

Code	A	B	C	MOQ-Pcs
10357AA0004.0	M 2	4,0	3,8	1.000
10357AA0005.0	M 2	5,0	3,8	1.000
10357AA0006.0	M 2	6,0	3,8	1.000
10357AA0008.0	M 2	8,0	3,8	1.000

Code	A	B	C	MOQ-Pcs
10357AA0010.0	M 2	10,0	3,8	1.000
10357AA0012.0	M 2	12,0	3,8	1.000
10357AA0016.0	M 2	16,0	3,8	1.000
10357AA0025.0	M 2	25,0	3,8	1.000
10358AA0004.0	M2.5	4,0	4,7	1.000
10358AA0005.0	M2.5	5,0	4,7	1.000
10358AA0006.0	M2.5	6,0	4,7	1.000
10358AA0008.0	M2.5	8,0	4,7	1.000
10358AA0010.0	M2.5	10,0	4,7	1.000
10358AA0012.0	M2.5	12,0	4,7	1.000
10358AA0016.0	M2.5	16,0	4,7	1.000
10358AA0020.0	M2.5	20,0	4,7	1.000
10358AA0025.0	M2.5	25,0	4,7	1.000
10359AA0005.0	M 3	5,0	5,6	1.000
10359AA0006.0	M 3	6,0	5,6	1.000
10359AA0008.0	M 3	8,0	5,6	1.000
10359AA0010.0	M 3	10,0	5,6	1.000
10359AA0012.0	M 3	12,0	5,6	1.000
10359AA0014.0	M 3	14,0	5,6	1.000
10359AA0016.0	M 3	16,0	5,6	1.000
10359AA0018.0	M 3	18,0	5,6	1.000
10359AA0020.0	M 3	20,0	5,6	1.000
10359AA0022.0	M 3	22,0	5,6	1.000
10359AA0024.0	M 3	24,0	5,6	1.000
10359AA0027.0	M 3	27,0	5,6	1.000
10359AA0030.0	M 3	30,0	5,6	1.000
10360AA0004.0	M 4	4,0	7,5	1.000
10360AA0006.0	M 4	6,0	7,5	1.000
10360AA0008.0	M 4	8,0	7,5	1.000
10360AA0010.0	M 4	10,0	7,5	1.000
10360AA0012.0	M 4	12,0	7,5	1.000

Code	A	B	C	MOQ-Pcs
10360AA0014.0	M 4	14,0	7,5	1.000
10360AA0016.0	M 4	16,0	7,5	1.000
10360AA0018.0	M 4	18,0	7,5	1.000
10360AA0020.0	M 4	20,0	7,5	1.000
10360AA0022.0	M 4	22,0	7,5	1.000
10360AA0025.0	M 4	25,0	7,5	1.000
10360AA0027.0	M 4	27,0	7,5	1.000
10360AA0030.0	M 4	30,0	7,5	1.000
10361AA0007.0	M 5	7,0	9,2	1.000
10361AA0008.0	M 5	8,0	9,2	1.000
10361AA0010.0	M 5	10,0	9,2	1.000
10361AA0012.0	M 5	12,0	9,2	1.000
10361AA0014.0	M 5	14,0	9,2	1.000
10361AA0016.0	M 5	16,0	9,2	1.000
10361AA0018.0	M 5	18,0	9,2	1.000
10361AA0020.0	M 5	20,0	9,2	1.000
10361AA0022.0	M 5	22,0	9,2	1.000
10361AA0025.0	M 5	25,0	9,2	1.000
10361AA0030.0	M 5	30,0	9,2	1.000
10361AA0035.0	M 5	35,0	9,2	1.000
10361AA0040.0	M 5	40,0	9,2	1.000
10362AA0008.0	M 6	8,0	11,0	1.000
10362AA0010.0	M 6	10,0	11,0	1.000
10362AA0012.0	M 6	12,0	11,0	1.000
10362AA0015.0	M 6	15,0	11,0	1.000
10362AA0020.0	M 6	20,0	11,0	1.000
10362AA0022.0	M 6	22,0	11,0	1.000
10362AA0025.0	M 6	25,0	11,0	1.000
10362AA0030.0	M 6	30,0	11,0	1.000
10362AA0035.0	M 6	35,0	11,0	1.000
10362AA0040.0	M 6	40,0	11,0	1.000

Code	A	B	C	MOQ-Pcs
10362AA0045.0	M 6	45,0	11,0	1.000
10363AA0010.0	M 8	10,0	14,5	1.000
10363AA0012.0	M 8	12,0	14,5	1.000
10363AA0014.0	M 8	14,0	14,5	1.000
10363AA0016.0	M 8	16,0	14,5	1.000
10363AA0018.0	M 8	18,0	14,5	1.000
10363AA0020.0	M 8	20,0	14,5	1.000
10363AA0025.0	M 8	25,0	14,5	1.000
10363AA0028.0	M 8	28,0	14,5	1.000
10363AA0030.0	M 8	30,0	14,5	1.000
10363AA0035.0	M 8	35,0	14,5	1.000
10364AA0010.0	M10	10,0	18,0	1.000
10364AA0012.0	M10	12,0	18,0	1.000
10364AA0016.0	M10	16,0	18,0	1.000
10364AA0020.0	M10	20,0	18,0	1.000
10364AA0025.0	M10	25,0	18,0	1.000
10364AA0030.0	M10	30,0	18,0	1.000
10364AA0035.0	M10	35,0	18,0	1.000
10364AA0040.0	M10	40,0	18,0	1.000