

FEET WITH SNAP RIVET



Technical description

Material foot: TPE / UL94 HB

Material rivet: PA 6 / UL94 V2


Colour: Black

Operating temperature: -30°C ~ +85°C


UI flammability foot HB (UL94)

UI flammability rivet V2 (UL94)

All dimensions are in mm.

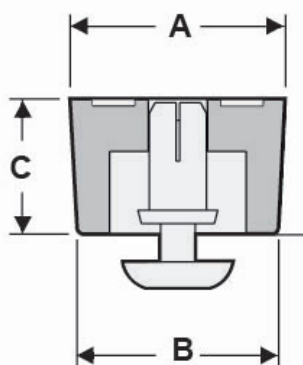

PRIMA DELL' INSERIMENTO
BEFORE INSERTION



DOPO L' INSERIMENTO
AFTER INSERTION

Code	A	B	C	Mounting hole	Thickness	MOQ-Pcs
9788EA01	21,0	20,0	4,2	Ø 4,1	0,8 - 1,8	500
9789EA01	21,0	20,0	4,2	Ø 4,1	1,8 - 2,8	500
9790EA01	21,0	20,0	4,2	Ø 4,1	2,9 - 3,7	500
9791EA01	21,0	20,0	4,2	Ø 4,1	3,8 - 4,8	500
9792EA01	15,0	14,0	6,0	Ø 4,1	0,6 - 1,0	500

Code	A	B	C	Mounting hole	Thickness	MOQ-Pcs
9793EA01	15,0	14,0	6,0	Ø 4,1	1,0 - 2,0	1.000
9794EA01	15,0	14,0	6,0	Ø 4,1	2,0 - 3,1	500
9795EA01	15,0	14,0	6,0	Ø 5,1	0,8 - 1,2	500
9796EA01	15,0	14,0	6,0	Ø 5,1	1,3 - 2,3	500
9797EA01	21,0	20,0	6,0	Ø 4,1	0,8 - 1,8	500
9798EA01	21,0	20,0	6,0	Ø 4,1	1,9 - 2,8	500
9799EA01	21,0	20,0	6,0	Ø 4,1	2,9 - 4,0	500
9800EA01	21,0	20,0	8,0	Ø 4,1	0,8	500
9801EA01	21,0	20,0	8,0	Ø 4,1	0,8 - 2,0	500
9802EA01	21,0	20,0	8,0	Ø 4,1	2,1 - 3,1	500
9803EA01	15,0	14,0	9,0	Ø 4,1	1,0 - 2,0	500
9804EA01	15,0	14,0	9,0	Ø 4,1	2,0 - 3,1	500
9805EA01	10,8	10,0	4,0	Ø 3,6	0,5 - 1,2	500
9806EA01	10,8	10,0	4,0	Ø 3,6	1,0 - 2,0	500
9807EA01	10,8	10,0	4,0	Ø 3,6	1,5 - 2,5	500
9808EA01	10,8	10,0	4,0	Ø 3,6	2,5 - 3,5	500
9809EA01	10,8	10,0	4,0	Ø 3,6	3,5 - 4,5	500
9909EA01	14,2	13,5	5,5	Ø 3,1	0,8 - 1,8	500
9910EA01	14,2	13,5	5,5	Ø 3,1	1,8 - 2,8	500
9911EA01	15,0	14,0	9,0	Ø 4,1	0,6 - 1,0	500
9912EA01	15,0	14,0	9,0	Ø 5,1	0,8 - 1,2	500
9913EA01	15,0	14,0	9,0	Ø 5,1	1,3 - 2,3	500