


# IP68 FOLDABLE 90° PLASTIC CABLE GLAND



## Technical description

**Material:** PA 66 w/Buna N or TPE Sealing Gland. **Color:** Black **Flammability:** V2 (UL94) **Temperatures:** Static -40°C to 115°C Dynamic -20°C to 100°C Degree of protection: IP68 **All dimensions are in mm** Grey color available by special request

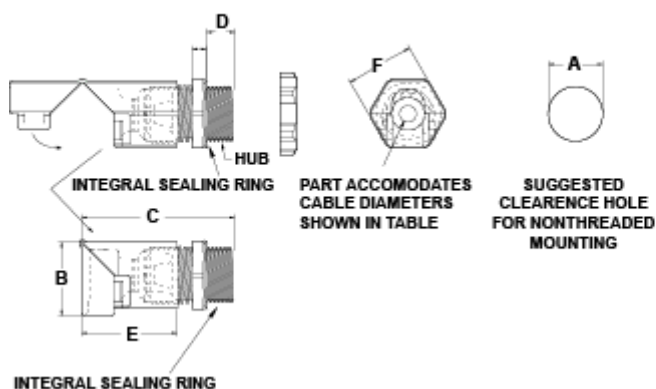

| Code      | A    | B    | C    | D    | E    | F    | FILETTATURA | Ø cable diameter | MOQ-Pcs |
|-----------|------|------|------|------|------|------|-------------|------------------|---------|
| 18535AA01 | 12,0 | 17,5 | 38,8 | 8,1  | 22,0 | 16,0 | M12 x 1,5   | Ø 1,7 - 5,3      | 100     |
| 18537AA01 | 12,0 | 17,5 | 38,8 | 8,1  | 22,0 | 16,0 | M12 x 1,5   | Ø 2,9 - 6,4      | 100     |
| 18539AA01 | 16,0 | 22,3 | 44,9 | 8,1  | 27,1 | 20,8 | M16 x 1,5   | Ø 1,7 - 5,8      | 100     |
| 18541AA01 | 16,0 | 22,3 | 44,9 | 8,1  | 27,1 | 20,8 | M16 x 1,5   | Ø 2,7 - 8,0      | 100     |
| 18543AA01 | 20,0 | 26,9 | 56,1 | 10,4 | 35,1 | 24,9 | M20 x 1,5   | Ø 2,4 - 7,4      | 100     |
| 18545AA01 | 20,0 | 26,9 | 56,1 | 10,4 | 35,1 | 24,9 | M20 x 1,5   | Ø 4,3 - 11,4     | 100     |
| 18547AA01 | 20,4 | 26,9 | 56,1 | 10,4 | 35,1 | 24,9 | PG13,5      | Ø 2,4 - 7,4      | 100     |
| 18549AA01 | 12,5 | 17,5 | 38,8 | 8,1  | 21,8 | 16,0 | PG7         | Ø 1,7 - 5,3      | 100     |
| 18551AA01 | 12,5 | 17,5 | 38,8 | 8,1  | 21,8 | 16,0 | PG7         | Ø 2,9 - 6,4      | 100     |
| 18553AA01 | 15,2 | 22,3 | 44,9 | 8,1  | 27,8 | 20,8 | PG9         | Ø 1,7 - 5,8      | 100     |
| 18555AA01 | 15,2 | 22,3 | 44,9 | 8,1  | 27,1 | 20,8 | PG9         | Ø 2,7 - 8,0      | 100     |

| Code      | A    | B    | C    | D    | E    | F    | FILETTATURA | Ø cable diameter | MOQ-Pcs |
|-----------|------|------|------|------|------|------|-------------|------------------|---------|
| 18557AA01 | 18,6 | 25,1 | 51,0 | 9,7  | 31,2 | 23,9 | PG11        | Ø 1,8 - 6,6      | 100     |
| 18559AA01 | 18,6 | 25,1 | 51,0 | 9,7  | 31,2 | 23,9 | PG11        | Ø 5,8 - 10,2     | 100     |
| 18561AA01 | 20,4 | 26,9 | 56,1 | 10,4 | 35,1 | 24,9 | PG13,5      | Ø 4,3 - 11,4     | 100     |