

MARKER TIES



Technical description


Material: PA 6.6

Colour: Natural

UL Flammability: V2 (UL 94)

Operating temperature: -35°C ~ +85°C

All dimensions are in mm.

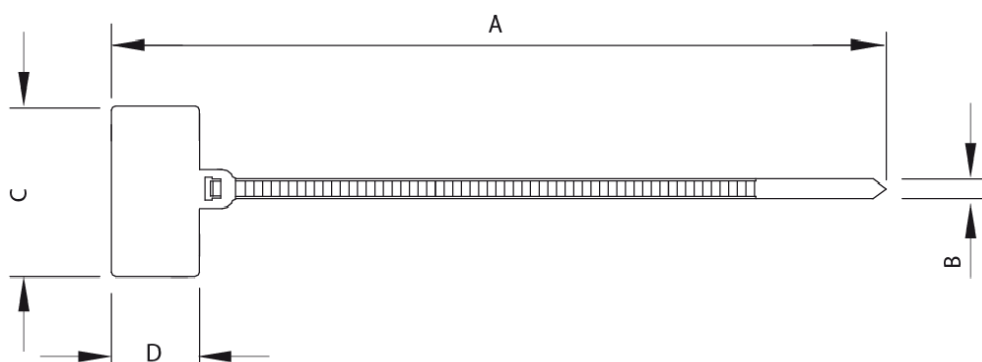

Code	A	B	C	D	Max cable	Min. loop tensile strenght (kg)	MOQ-Pcs
2435AA00	110,0	2,5	20,4	9,0	18,0	8,1	1.000