


P.C.B. SUPPORTS

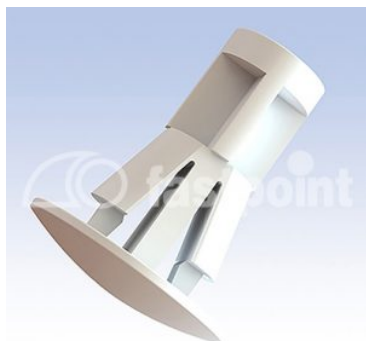

Technical description


Material: PA 6.6

Colour: Natural

UL Flammability: V2 (UL 94)

Operating temperature: -35°C ~ +85°C

All dimensions are in mm.

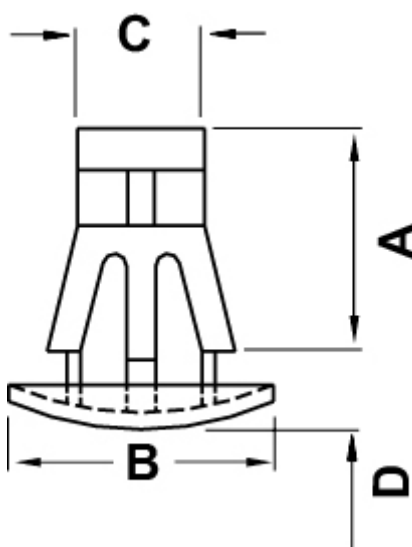

Code	A	B	C	D	Mounting hole	Thickness	MOQ-Pcs
5314AA00	6,0	10,0	4,9	2,9	Ø 5,5	1,2 - 1,8	1.000
5315AA00	7,0	10,0	5,0	3,1	Ø 5,5	0,8 - 1,6	1.000
5316AA00	8,0	10,0	5,0	3,1	Ø 5,5	0,8 - 1,6	1.000
5317AA00	10,0	10,0	5,0	3,1	Ø 5,5	0,8 - 1,6	1.000
5318AA00	12,0	10,0	5,0	3,1	Ø 5,5	0,8 - 1,6	1.000

Code	A	B	C	D	Mounting hole	Thickness	MOQ-Pcs
5319AA00	14,0	10,0	5,0	3,1	Ø 5,5	0,8 - 1,6	1.000
5320AA00	16,0	10,0	5,0	3,1	Ø 5,5	0,8 - 1,6	1.000
5321AA00	18,0	10,0	5,0	3,1	Ø 5,5	0,8 - 1,6	1.000