


PG VENTILATION GLANDS IP68



Technical description

Gland body material: PA 66 V2 (UL94) **Sealing ring:** TPV **O-ring:** NBR - EPDM **Working temperature:** -20°C ~ +100°C **Protection grade:** IP68 **PG according DIN 40430** All dimensions are in mm

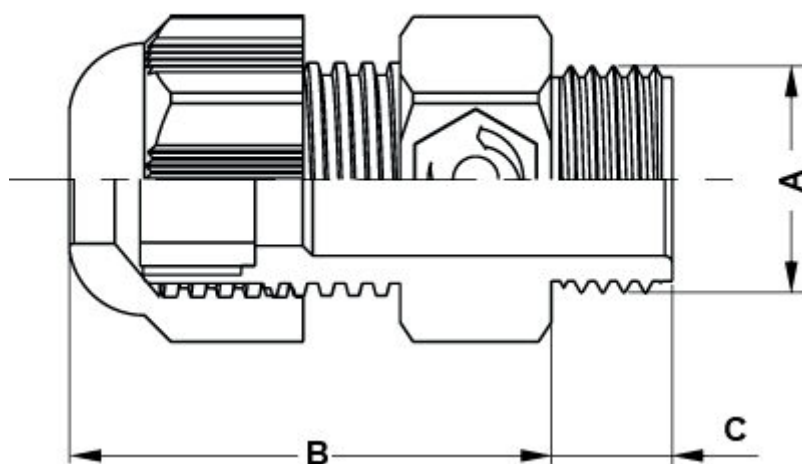

Code	A	B	C	Colour	Ø cable diameter	Mounting hole	Average Air Flow I/H	Water intrusion	MOQ-Pcs
13255AA019005	PG 7	29,0	8,0	RAL 9005	4 - 8	Ø 13,0	70,0	0,1	100
13255AA117035	PG 7	29,0	8,0	RAL 7035	4 - 8	Ø 13,0	70,0	0,1	100
13256AA019005	PG 9	33,0	8,0	RAL 9005	4 - 8	Ø 15,5	70,0	0,1	100
13256AA117035	PG 9	33,0	8,0	RAL 7035	4 - 8	Ø 15,5	70,0	0,1	100
13257AA019005	PG 11	34,0	10,0	RAL 9005	5,0 - 10,0	Ø 19,0	70,0	0,1	100

Code	A	B	C	Colour	Ø cable diameter	Mounting hole	Average Air Flow I/H	Water intrusion	MOQ-Pcs
13257AA117035	PG 11	34,0	10,0	RAL 7035	5,0 - 10,0	Ø 19,0	70,0	0,1	100
13258AA019005	PG 13.5	34,0	10,0	RAL 9005	4,0 - 9,0	Ø 21,0	70,0	0,1	100
13258AA117035	PG 13.5	34,0	10,0	RAL 7035	4,0 - 9,0	Ø 21,0	70,0	0,1	100
13259AA019005	PG 13.5	34,0	10,0	RAL 9005	6,0 - 12,0	Ø 21,0	70,0	0,1	100
13259AA117035	PG 13.5	34,0	10,0	RAL 7035	6,0 - 12,0	Ø 21,0	70,0	0,1	100