


# POLYCARBONATE INSULATED FEMALE CONNECTORS



## Technical description

Terminal material: Tin-plated brass Isolation: Polycarbonate PC Color: see table Rated voltage: 300V max. Working temperature: 125°C max. All dimensions are in mm

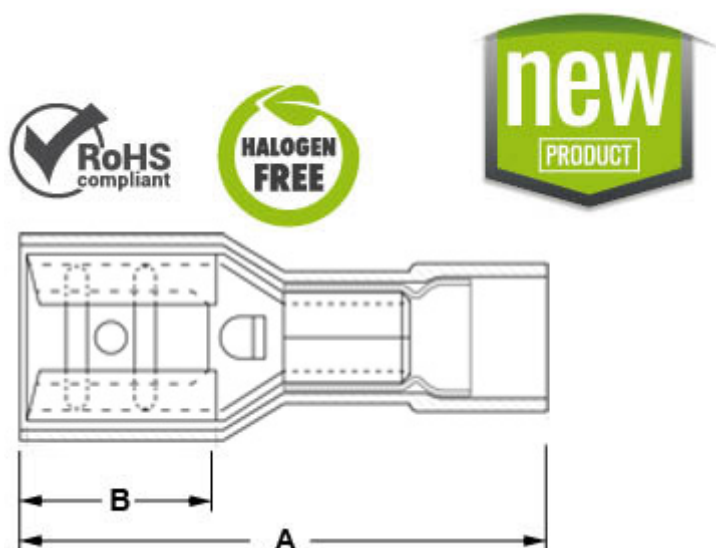

Code	A	B	Tab	Section mm <sup>2</sup>	Colour	MOQ-Pcs
16586NA08	20,2	6,5	4,8x0,5	1,5 - 2,5	Blu / Blue / Blau	100
16587NA08	20,2	6,5	4,8x0,8	1,5 - 2,5	Blu / Blue / Blau	100
16588NA08	21,5	7,3	6,3x0,8	1,5 - 2,5	Blu / Blue / Blau	100
16590NA06	24,2	7,3	6,3x0,8	4,0 - 6,0	Giallo - Yellow - Gelb	100
16591NA04	19,2	6,4	2,8x0,5	0,5 - 1,0	Rosso - Red - Rot	100
16592NA04	19,2	6,4	2,8x0,8	0,5 - 1,0	Rosso - Red - Rot	100
16593NA04	20,2	6,4	1,5x2,5	0,5 - 1,0	Rosso - Red - Rot	100
16594NA04	20,2	6,4	4,8x0,8	0,5 - 1,0	Rosso - Red - Rot	100
16595NA04	21,5	7,3	6,3x0,8	0,5 - 1,0	Rosso - Red - Rot	100