


CABLE TIES WITH FREE HOOKING FOR HOLE 4.8/5.2/6.3

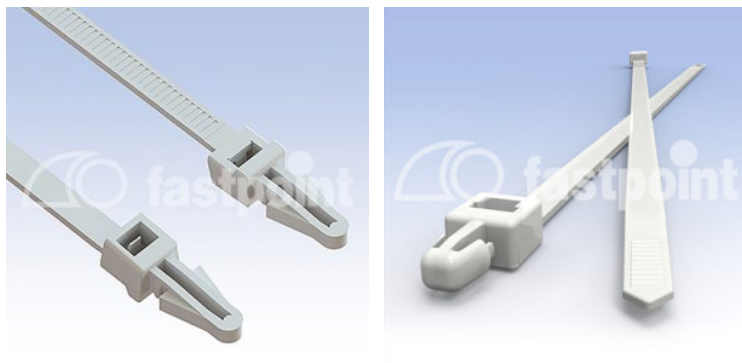

Technical description

Material: PA 6.6


Colour: Natural

UL Flammability: V2 (UL 94)

Working temperature:

-35° ~ +85°C

All dimensions are in mm.

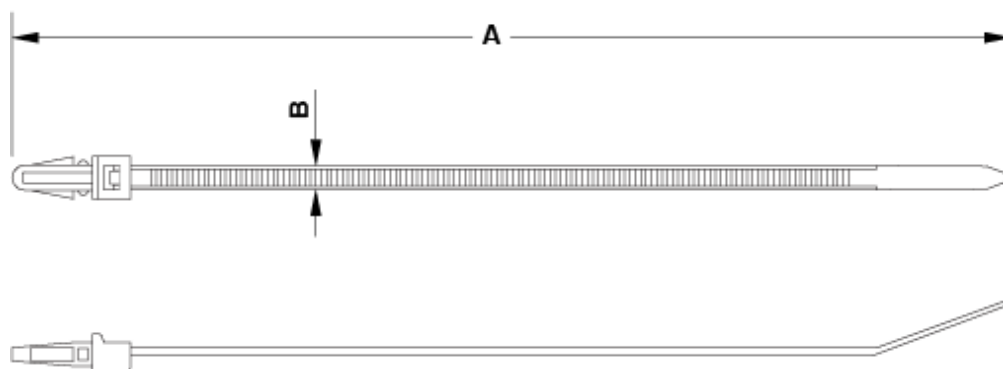

Code	A	B	Mounting hole	Thickness	Max cable	Min. loop tensile strenght (kg)	MOQ-Pcs
2501AA00	150,0	3,6	Ø 5,2	1,0 - 2,8	Ø 32	13,6	1.000
2502AA00	200,0	4,8	Ø 6,3	1,0 - 3,6	Ø 46	22,2	1.000