

RELEASABLE RIVET THICKNESS 3,8 – 4,8 MM



Technical description


Material Body: POM

Material Rivet: PBT 15% GV

UL Flammability body : HB (UL94)

UL Flammability rivet: V0 (UL94)

Working temperature: -35°C ~ + 100°C

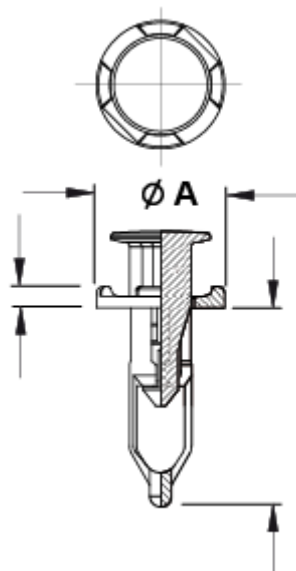

Code	A	B	C	Mounting hole	Thickness	Type	MOQ-Pcs
10528GA01	18,0	3,1	28,1	$\varnothing 9,0$	3,8 - 4,8	4	1.000