

RELEASABLE RIVET THICKNESS 4,1 – 4,2 MM




Technical description

Material: POM

Working temperature: -35°C ~ +100°C

UL Flammability: HB (UL94)

All dimensions are in mm.

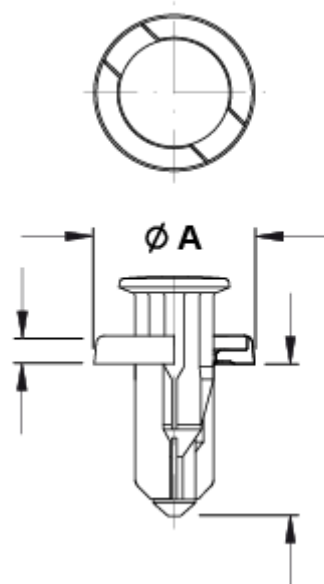

Code	A	B	C	Mounting hole	Thickness	MOQ-Pcs
10527GA01	16,0	2,6	9,8	Ø 8,0	4,1 - 4,2	1.000