

ROUND SPACERS INNER DIAM. 5,5



Technical description

Material: PA 6 , 25%GV

UL Flammability: HB (UL 94)

Colour: Black

Operating temperature: -35°C ~ +100°C

Available in white Polystyrol on special request :


Material: polystyrene

UL Flammability: HB (UL 94)

Colour: White

Operating temperature: -40°C ~ +70°C

All dimensions are in mm.

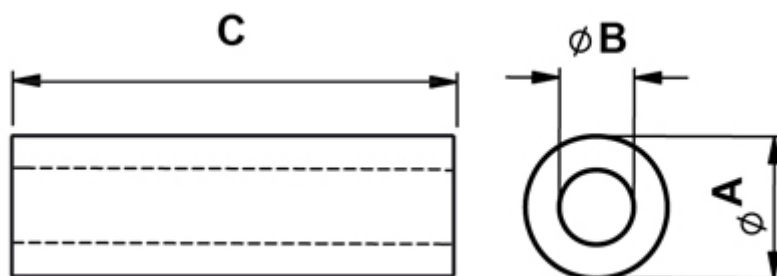

Code	A	B	C	MOQ-Pcs
10111BB0102.0	8,5	5,5	2,0	500
10111BB0103.0	8,5	5,5	3,0	500

Code	A	B	C	MOQ-Pcs
10111BB0104.0	8,5	5,5	4,0	500
10111BB0105.0	8,5	5,5	5,0	500
10111BB0106.0	8,5	5,5	6,0	500
10111BB0107.0	8,5	5,5	7,0	500
10111BB0108.0	8,5	5,5	8,0	500
10111BB0109.0	8,5	5,5	9,0	500
10111BB0110.0	8,5	5,5	10,0	500
10111BB0111.0	8,5	5,5	11,0	500
10111BB0112.0	8,5	5,5	12,0	500
10111BB0113.0	8,5	5,5	13,0	500
10111BB0114.0	8,5	5,5	14,0	500
10111BB0115.0	8,5	5,5	15,0	500
10111BB0116.0	8,5	5,5	16,0	500
10111BB0117.0	8,5	5,5	17,0	500
10111BB0118.0	8,5	5,5	18,0	500
10111BB0119.0	8,5	5,5	19,0	500
10111BB0120.0	8,5	5,5	20,0	500
10111BB0121.0	8,5	5,5	21,0	500
10111BB0122.0	8,5	5,5	22,0	500
10111BB0123.0	8,5	5,5	23,0	500
10111BB0124.0	8,5	5,5	24,0	500
10111BB0125.0	8,5	5,5	25,0	500
10111BB0126.0	8,5	5,5	26,0	500
10111BB0127.0	8,5	5,5	27,0	500
10111BB0128.0	8,5	5,5	28,0	500
10111BB0129.0	8,5	5,5	29,0	500
10111BB0130.0	8,5	5,5	30,0	500
10111BB0131.0	8,5	5,5	31,0	500
10111BB0132.0	8,5	5,5	32,0	500
10111BB0133.0	8,5	5,5	33,0	500
10111BB0134.0	8,5	5,5	34,0	500

Code	A	B	C	MOQ-Pcs
10111BB0135.0	8,5	5,5	35,0	500
10111BB0136.0	8,5	5,5	36,0	500
10111BB0137.0	8,5	5,5	37,0	500
10111BB0138.0	8,5	5,5	38,0	500
10111BB0139.0	8,5	5,5	39,0	500
10111BB0140.0	8,5	5,5	40,0	500
10111BB0141.0	8,5	5,5	41,0	500
10111BB0142.0	8,5	5,5	42,0	500
10111BB0143.0	8,5	5,5	43,0	500
10111BB0144.0	8,5	5,5	44,0	500
10111BB0145.0	8,5	5,5	45,0	500
10111BB0146.0	8,5	5,5	46,0	500
10111BB0147.0	8,5	5,5	47,0	500
10111BB0148.0	8,5	5,5	48,0	500
10111BB0149.0	8,5	5,5	49,0	500
10111BB0150.0	8,5	5,5	50,0	500
10111BB0151.0	8,5	5,5	51,0	500
10111BB0153.0	8,5	5,5	53,0	500
10111BB0154.0	8,5	5,5	54,0	500
10111BB0155.0	8,5	5,5	55,0	500
10111BB0156.0	8,5	5,5	56,0	500
10111BB0157.0	8,5	5,5	57,0	500
10111BB0158.0	8,5	5,5	58,0	500
10111BB0159.0	8,5	5,5	59,0	500
10111BB0160.0	8,5	5,5	60,0	500