


ROUND THREADED SPACER Ø 5,5

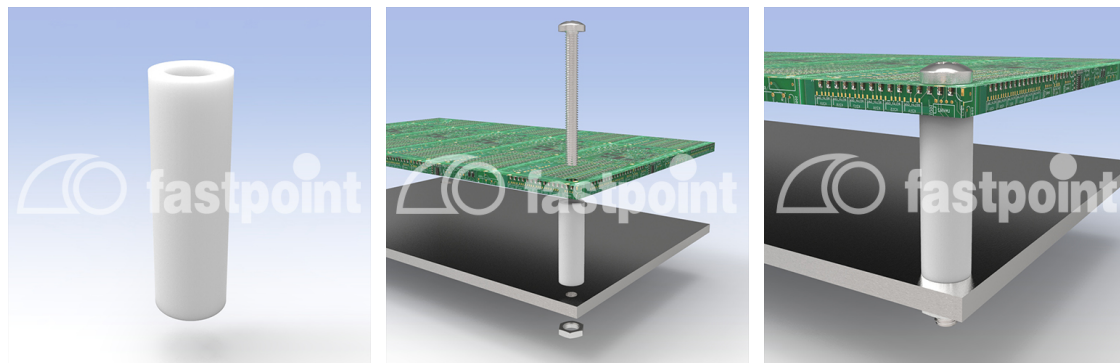

Technical description



Material: PA 6.6

Colour: Natural

Flammability: V2 (UL 94)

Working temperature: -35°C ~ +85°C

All dimensions are in mm

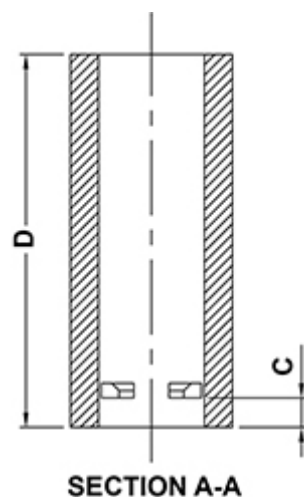

Code	A	B	C	D	MOQ-Pcs
11454AA0001.5	5,5	3,6	1,0	1,5	2.000
11454AA0002.0	5,5	3,6	1,0	2,0	2.000
11454AA0003.0	5,5	3,6	1,0	3,0	2.000
11454AA0003.5	5,5	3,6	1,0	3,5	2.000

Code	A	B	C	D	MOQ-Pcs
11454AA0004.0	5,5	3,6	1,0	4,0	2.000
11454AA0005.0	5,5	3,6	1,0	5,0	2.000
11454AA0006.0	5,5	3,6	1,0	6,0	2.000
11454AA0006.3	5,5	3,6	1,0	6,3	2.000
11454AA0007.0	5,5	3,6	1,0	7,0	2.000
11454AA0008.0	5,5	3,6	1,0	8,0	2.000
11454AA0009.0	5,5	3,6	1,0	9,0	2.000
11454AA0009.5	5,5	3,6	1,0	9,5	2.000
11454AA0010.0	5,5	3,6	1,0	10,0	2.000
11454AA0011.0	5,5	3,6	1,0	11,0	2.000
11454AA0012.0	5,5	3,6	1,0	12,0	2.000
11454AA0013.0	5,5	3,6	1,0	13,0	2.000
11454AA0014.0	5,5	3,6	1,0	14,0	2.000
11454AA0015.0	5,5	3,6	1,0	15,0	2.000
11454AA0016.0	5,5	3,6	1,0	16,0	2.000
11454AA0017.0	5,5	3,6	1,0	17,0	2.000
11454AA0018.0	5,5	3,6	1,0	18,0	2.000
11454AA0019.0	5,5	3,6	1,0	19,0	2.000
11454AA0020.0	5,5	3,6	1,0	20,0	1.000
11454AA0021.0	5,5	3,6	1,0	21,0	1.000
11454AA0022.0	5,5	3,6	1,0	22,0	1.000
11454AA0023.0	5,5	3,6	1,0	23,0	1.000
11454AA0024.0	5,5	3,6	1,0	24,0	1.000
11454AA0025.0	5,5	3,6	1,0	25,0	1.000
11454AA0025.4	5,5	3,6	1,0	25,4	1.000
11454AA0026.0	5,5	3,6	1,0	26,0	1.000
11454AA0027.0	5,5	3,6	1,0	27,0	1.000
11454AA0028.0	5,5	3,6	1,0	28,0	1.000
11454AA0029.0	5,5	3,6	1,0	29,0	1.000
11454AA0030.0	5,5	3,6	1,0	30,0	1.000