


SPACER SUPPORT WITH SCREW



Technical description

Material: PA 6.6 **Flammability:** V2 (UL94) **Colour:** Natural **Working temperature:** -35°C~+85°C **All dimensions are in mm**

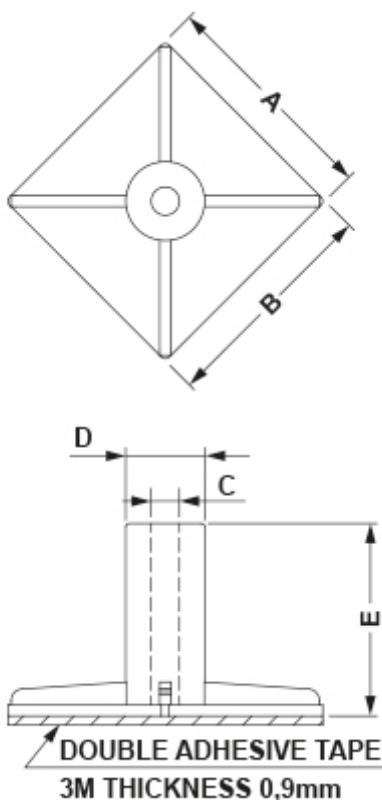

Code	A	B	C	D	E	MOQ-Pcs
12360AA00AS	20,0	20,0	Ø 2,5	Ø 7,0	4,2	500
12361AA00AS	20,0	20,0	Ø 2,5	Ø 7,0	5,6	500
12362AA00AS	20,0	20,0	Ø 2,5	Ø 7,0	7,2	500
12363AA00AS	20,0	20,0	Ø 2,5	Ø 7,0	8,2	500
12364AA00AS	20,0	20,0	Ø 2,5	Ø 7,0	10,0	500

Code	A	B	C	D	E	MOQ-Pcs
12365AA00AS	20,0	20,0	Ø 2,5	Ø 7,0	11,9	500
12366AA00AS	20,0	20,0	Ø 2,5	Ø 7,0	13,6	500
12367AA00AS	20,0	20,0	Ø 2,5	Ø 7,0	16,3	500
12368AA00AS	20,0	20,0	Ø 2,5	Ø 7,0	18,3	500
12369AA00AS	20,0	20,0	Ø 2,5	Ø 7,0	27,6	500
8297AA00AS	20,0	20,0	Ø 2,5	Ø 7,0	62,0	500
8498AA00AS	20,0	20,0	Ø 2,5	Ø 7,0	15,1	500