

SPLITTABLE FRAME FOR PRE-TERMINATED CABLES



Technical description


Material: PP+GF

Colour: Black

Flammability: V0 (UL94)

Working temperature: -40°C ~ +155°C

All dimensions are in mm

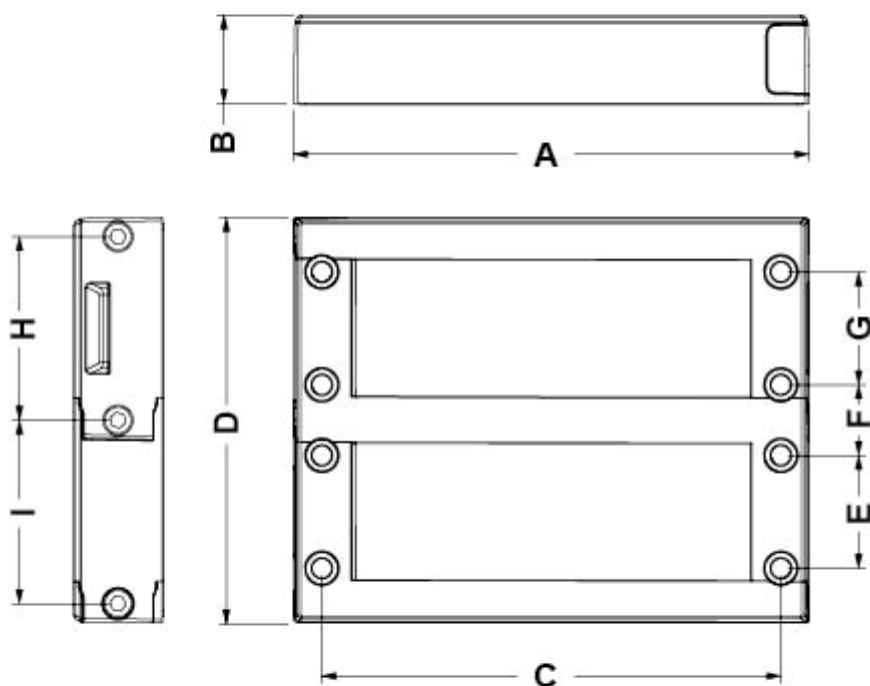

Code	A	B	C	D	E	F	G	H	I	Mounting hole	MOQ-Pcs
17859FG01	146,0	25,0	130,0	114,0	32,0	20,0	32,0	52,0	52,0	114,0 x 92,0	1
17860FG01	146,0	25,0	130,0	166,0	32,0	20,0	32,0	52,0	52,0	114,0 x 144,0	1
17861FG01	146,0	25,0	130,0	218,0	32,0	20,0	32,0	52,0	52,0	114,0 x 196,0	1
17862FG01	146,0	25,0	130,0	270,0	32,0	20,0	32,0	52,0	52,0	114,0 x 248,0	1

Code	A	B	C	D	E	F	G	H	I	Mounting hole	MOQ-Pcs
18937FG01	146,0	25,0	130,0	582,0	32,0	20,0	32,0	52,0	52,0	114,0 x 560,0	1
18938FG01	146,0	25,0	130,0	322,0	32,0	20,0	32,0	52,0	52,0	114,0 x 300,0	1
18939FG01	146,0	25,0	130,0	374,0	32,0	20,0	32,0	52,0	52,0	114,0 x 352,0	1
18940FG01	146,0	25,0	130,0	426,0	32,0	20,0	32,0	52,0	52,0	114,0 x 404,0	1
18941FG01	146,0	25,0	130,0	478,0	32,0	20,0	32,0	52,0	52,0	114,0 x 456,0	1
18942FG01	146,0	25,0	130,0	530,0	32,0	20,0	32,0	52,0	52,0	114,0 x 508,0	1