

ST LOCKIT™ STRAIN RELIEF BUSHINGS



Technical description







Material: PA 6.6

Colour: see table

Flammability: V2 (UL94)

Working temperature: -18°C ~ +105°C

All dimensions are in mm

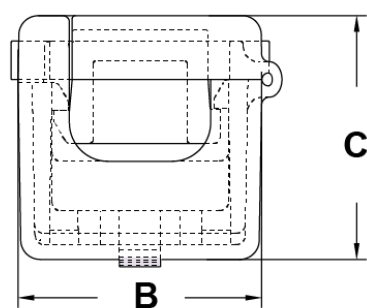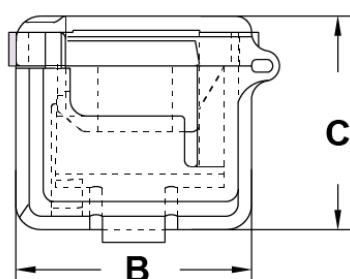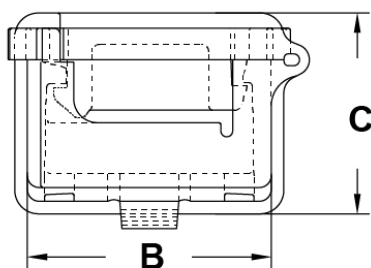

Code	A	B	C	Mounting hole	Thickness	Ø cable diameter	Colour	Type	MOQ-Pcs
16489AA01	14,0	15,5	13,0	11,5 x 16,0	0,8 - 2,5	0,8 - 9,7	Nero	1	1.500
16489AA02	14,0	15,5	13,0	11,5 x 16,0	0,8 - 2,5	0,8 - 9,7	Bianco	1	4.500
16490AA01	14,0	14,2	13,0	11,5 x 13,0	0,8 - 2,5	3,0 - 7,6	Nero	2	1.000
16490AA02	14,0	14,2	13,0	11,5 x 13,0	0,8 - 2,5	3,0 - 7,6	Bianco	2	5.000
16491AA01	18,3	19,3	19,3	17,5 x 17,5	0,8 - 4,0	3,8 - 10,7	Nero	3	1.000
16491AA02	18,3	19,3	19,3	17,5 x 17,5	0,8 - 4,0	3,8 - 10,7	Bianco	3	3.000