

# LOUVERED PLUGS AND FILTER INSERT



## Technical description

**Material:** PA 6.6



**Colour:** Black

**UL Flammability:** V2 (UL 94)

**Operating temperature:** -40°C ~ +105°C

White color available on request

All dimensions are in mm.

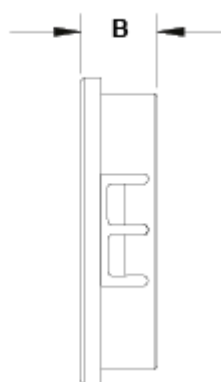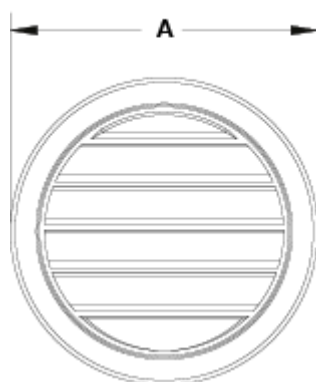

Code	A	B	Mounting hole	Thickness	Colour	MOQ-Pcs
18046AA01	25,8	13,5	Ø 22,2	max. 3,2	Nero - Black - Schwarz	4.500
18046AA02	25,8	13,5	Ø 22,2	max. 3,2	Bianco - White - Weiß	4.500
18047AA01	30,6	13,5	Ø25,4	max. 3,2	Nero - Black - Schwarz	4.500
18047AA02	30,6	13,5	Ø25,4	max. 3,2	Bianco - White - Weiß	4.500
17905AA01	30,9	13,5	Ø 27,8-28,6	max. 3,2	Nero - Black - Schwarz	2.000
17905AA02	30,9	13,5	Ø 27,8-28,6	max. 3,2	Bianco - White - Weiß	2.000
18048AA01	38,1	13,8	Ø 28,6	max. 3,2	Nero - Black - Schwarz	1.500
17906AA01	38,1	13,8	Ø 34,9	max. 3,2	Nero - Black - Schwarz	2.000
17906AA02	38,1	13,8	Ø 34,9	max. 3,2	Bianco - White - Weiß	2.000

Code	A	B	Mounting hole	Thickness	Colour	MOQ-Pcs
18048AA02	42,6	13,8	Ø 38,1	max. 3,2	Bianco - White - Weiß	1.500
17907AA01	55,1	13,8	Ø 50,8	max. 3,2	Nero - Black - Schwarz	1.000
17907AA02	55,1	20,9	Ø 50,8	max. 3,2	Bianco - White - Weiß	1.000
18049AA01	69,0	20,9	Ø 63,5	Max. 6,4	Nero - Black - Schwarz	375
18049AA02	69,0	20,9	Ø 63,5	Max. 6,4	Bianco - White - Weiß	450
18050AA01	80,5	20,9	Ø 76,2	Max. 6,4	Nero - Black - Schwarz	300
18050AA02	80,5	20,9	Ø 76,2	Max. 6,4	Bianco - White - Weiß	300