


# CADENA PORTACABLES

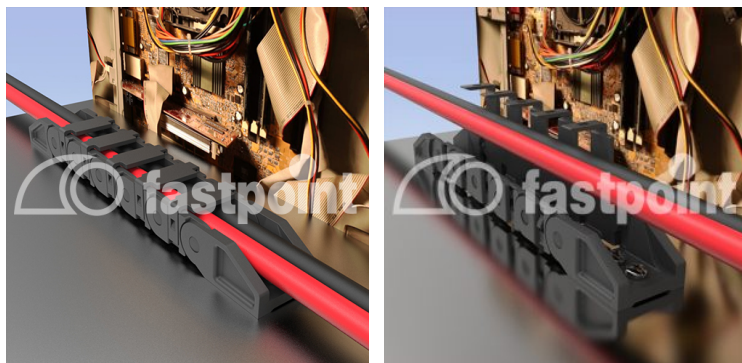

## Descripción Técnica

**Material:** PA66


**Color:** Negro

**Autoextinguibilidad:** UL94-V2

**Temperatura de trabajo:** -35°C ~ +85°C

**J:** Cantidad

Todas las medidas están indicadas en mm

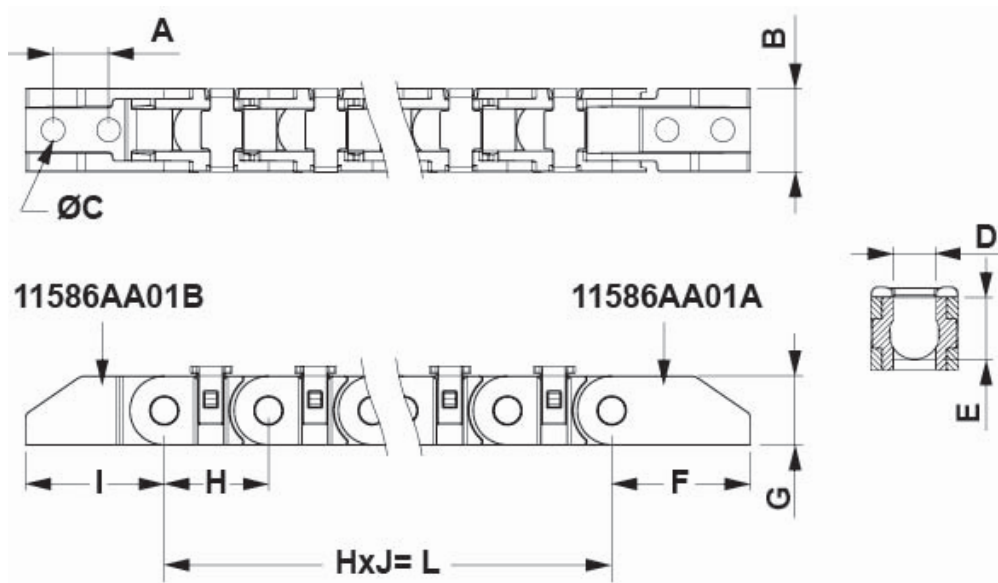

Codigo	A	B	C	D	E	F	G	H	I	J	Conf./piezas
11586AA0105	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	5,0	1.000

Codigo	A	B	C	D	E	F	G	H	I	J	Conf./piezas
11586AA0110	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	10,0	1.000
11586AA0115	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	15,0	1.000
11586AA0120	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	20,0	1.000
11586AA0125	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	25,0	1.000
11586AA0130	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	30,0	1.000
11586AA0135	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	35,0	1.000
11586AA0140	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	40,0	1.000
11586AA0145	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	45,0	1.000
11586AA0150	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	50,0	1.000
11586AA0155	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	55,0	1.000
11586AA0160	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	60,0	1.000
11586AA0165	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	65,0	1.000
11586AA0170	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	70,0	1.000
11586AA01A	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	-	1.000
11586AA01B	8,0	12,0	3,4	6,0	8,7	20,0	10,0	15,0	20,0	-	1.000