

SEPARADOR HEXAGONAL MH M3 HEXÁGONO DE 8



Descripción Técnica


Materiale: PA66

Color: Negro

Autoexinguibilidad: UL94-HB

Temperatura de trabajo: -35°C ~ +130°C

Todas las medidas están indicadas en mm

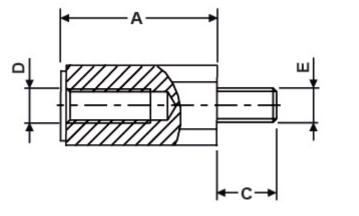



Codigo	Α	В	С	D	E	Conf./piezas
6923AA0105.0	5,0	8,0	8,0	М3	М3	500
6923AA0106.0	6,0	8,0	8,0	М3	М3	500
6923AA0107.0	7,0	8,0	8,0	М3	М3	500
6923AA0108.0	8,0	8,0	8,0	М3	М3	500
6923AA0109.0	9,0	8,0	8,0	М3	М3	500
6923AA0110.0	10,0	8,0	8,0	М3	М3	500
6923AA0111.0	11,0	8,0	8,0	М3	М3	500



Codigo	A	В	С	D	E	Conf./piezas
6923AA0112.0	12,0	8,0	8,0	М3	М3	500
6923AA0113.0	13,0	8,0	8,0	М3	М3	500
6923AA0114.0	14,0	8,0	8,0	М3	М3	500
6923AA0115.0	15,0	8,0	8,0	М3	М3	500
6923AA0116.0	16,0	8,0	8,0	М3	М3	500
6923AA0117.0	17,0	8,0	8,0	М3	М3	500
6923AA0118.0	18,0	8,0	8,0	М3	М3	500
6923AA0119.0	19,0	8,0	8,0	М3	М3	500
6923AA0120.0	20,0	8,0	8,0	М3	М3	500
6923AA0121.0	21,0	8,0	8,0	М3	М3	500
6923AA0122.0	22,0	8,0	8,0	М3	М3	500
6923AA0123.0	23,0	8,0	8,0	М3	М3	500
6923AA0124.0	24,0	8,0	8,0	М3	М3	500
6923AA0125.0	25,0	8,0	8,0	М3	М3	500
6923AA0126.0	26,0	8,0	8,0	М3	М3	500
6923AA0127.0	27,0	8,0	8,0	М3	М3	500
6923AA0128.0	28,0	8,0	8,0	М3	М3	500
6923AA0129.0	29,0	8,0	8,0	М3	М3	500
6923AA0130.0	30,0	8,0	8,0	М3	М3	500
6923AA0131.0	31,0	8,0	8,0	М3	М3	500
6923AA0132.0	32,0	8,0	8,0	М3	М3	500
6923AA0133.0	33,0	8,0	8,0	М3	М3	500
6923AA0134.0	34,0	8,0	8,0	М3	М3	500
6923AA0135.0	35,0	8,0	8,0	М3	М3	500
6923AA0136.0	36,0	8,0	8,0	М3	М3	500
6923AA0137.0	37,0	8,0	8,0	М3	М3	500
6923AA0138.0	38,0	8,0	8,0	М3	М3	500
6923AA0139.0	39,0	8,0	8,0	М3	М3	500
6923AA0140.0	40,0	8,0	8,0	М3	М3	500
6923AA0141.0	41,0	8,0	8,0	М3	М3	500
6923AA0142.0	42,0	8,0	8,0	М3	М3	500



Codigo	Α	В	С	D	E	Conf./piezas
6923AA0143.0	43,0	8,0	8,0	М3	М3	500
6923AA0144.0	44,0	8,0	8,0	М3	М3	500
6923AA0145.0	45,0	8,0	8,0	М3	М3	500
6923AA0146.0	46,0	8,0	8,0	М3	М3	500
6923AA0147.0	47,0	8,0	8,0	М3	М3	500
6923AA0148.0	48,0	8,0	8,0	М3	М3	500
6923AA0149.0	49,0	8,0	8,0	М3	М3	500
6923AA0150.0	50,0	8,0	8,0	М3	М3	500
6923AA0151.0	51,0	8,0	8,0	М3	М3	500
6923AA0152.0	52,0	8,0	8,0	М3	М3	500
6923AA0153.0	53,0	8,0	8,0	М3	М3	500
6923AA0154.0	54,0	8,0	8,0	М3	М3	500
6923AA0155.0	55,0	8,0	8,0	М3	М3	500
6923AA0156.0	56,0	8,0	8,0	М3	М3	500
6923AA0157.0	57,0	8,0	8,0	М3	М3	500
6923AA0158.0	58,0	8,0	8,0	М3	М3	500
6923AA0159.0	59,0	8,0	8,0	М3	М3	500
6923AA0160.0	60,0	8,0	8,0	М3	М3	500
6923AA0161.0	61,0	8,0	8,0	М3	М3	500