


TORNILLO AVELLANADO DIN 2010

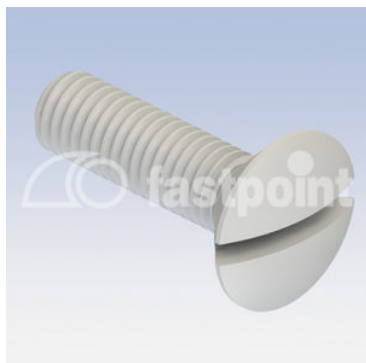

Descripción Técnica


Material: PA6

Color: Natural

Norma de referencia: DIN 2010 (antes DIN 964)

Temperatura de trabajo: -30°C~ +100° C

Todas las medidas están indicadas en mm

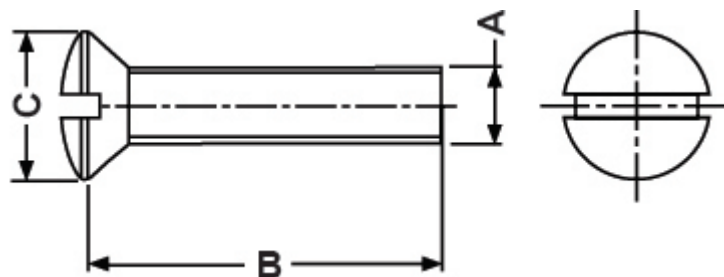

Codigo	A	B	C	Conf./piezas
10365AA0004.0	M 2	4,0	3,8	1.000
10365AA0005.0	M 2	5,0	3,8	1.000
10365AA0006.0	M 2	6,0	3,8	1.000
10365AA0008.0	M 2	8,0	3,8	1.000
10365AA0010.0	M 2	10,0	3,8	1.000
10365AA0012.0	M 2	12,0	3,8	1.000
10365AA0016.0	M 2	16,0	3,8	1.000
10365AA0025.0	M 2	25,0	3,8	1.000
10366AA0004.0	M2.5	4,0	4,7	1.000

Codigo	A	B	C	Conf./piezas
10366AA0005.0	M2.5	5,0	4,7	1.000
10366AA0006.0	M2.5	6,0	4,7	1.000
10366AA0008.0	M2.5	8,0	4,7	1.000
10366AA0010.0	M2.5	10,0	4,7	1.000
10366AA0012.0	M2.5	12,0	4,7	1.000
10366AA0016.0	M2.5	16,0	4,7	1.000
10366AA0020.0	M2.5	20,0	4,7	1.000
10366AA0025.0	M2.5	25,0	4,7	1.000
10367AA0005.0	M 3	5,0	5,6	1.000
10367AA0006.0	M 3	6,0	5,6	1.000
10367AA0008.0	M 3	8,0	5,6	1.000
10367AA0010.0	M 3	10,0	5,6	1.000
10367AA0012.0	M 3	12,0	5,6	1.000
10367AA0014.0	M 3	14,0	5,6	1.000
10367AA0016.0	M 3	16,0	5,6	1.000
10367AA0018.0	M 3	18,0	5,6	1.000
10367AA0020.0	M 3	20,0	5,6	1.000
10367AA0022.0	M 3	22,0	5,6	1.000
10367AA0024.0	M 3	24,0	5,6	1.000
10367AA0027.0	M 3	27 ,0	5,6	1.000
10367AA0030.0	M 3	30,0	5,6	1.000
10368AA0004.0	M 4	4,0	7,5	1.000
10368AA0006.0	M 4	6,0	7,5	1.000
10368AA0008.0	M 4	8,0	7,5	1.000
10368AA0010.0	M 4	10,0	7,5	1.000
10368AA0012.0	M 4	12,0	7,5	1.000
10368AA0014.0	M 4	14,0	7,5	1.000
10368AA0016.0	M 4	16,0	7,5	1.000
10368AA0018.0	M 4	18,0	7,5	1.000
10368AA0020.0	M 4	20,0	7,5	1.000
10368AA0022.0	M 4	22,0	7,5	1.000

Codigo	A	B	C	Conf./piezas
10368AA0025.0	M 4	25,0	7,5	1.000
10368AA0027.0	M 4	27,0	7,5	1.000
10368AA0030.0	M 4	30,0	7,5	1.000
10369AA0007.0	M 5	7,0	9,2	1.000
10369AA0008.0	M 5	8,0	9,2	1.000
10369AA0010.0	M 5	10,0	9,2	1.000
10369AA0012.0	M 5	12,0	9,2	1.000
10369AA0014.0	M 5	14,0	9,2	1.000
10369AA0016.0	M 5	16,0	9,2	1.000
10369AA0018.0	M 5	18,0	9,2	1.000
10369AA0020.0	M 5	20,0	9,2	1.000
10369AA0022.0	M 5	22,0	9,2	1.000
10369AA0025.0	M 5	25,0	9,2	1.000
10369AA0030.0	M 5	30,0	9,2	1.000
10369AA0035.0	M 5	35,0	9,2	1.000
10369AA0040.0	M 5	40,0	9,2	1.000
10370AA0008.0	M 6	8,0	11,0	1.000
10370AA0010.0	M 6	10,0	11,0	1.000
10370AA0012.0	M 6	12,0	11,0	1.000
10370AA0016.0	M 6	16,0	11,0	1.000
10370AA0020.0	M 6	20,0	11,0	1.000
10370AA0022.0	M 6	22,0	11,0	1.000
10370AA0025.0	M 6	25,0	11,0	1.000
10370AA0030.0	M 6	30,0	11,0	1.000
10370AA0035.0	M 6	35,0	11,0	1.000
10370AA0040.0	M 6	40,0	11,0	1.000
10370AA0045.0	M 6	45,0	11,0	1.000
10371AA0010.0	M 8	10,0	14,5	1.000
10371AA0012.0	M 8	12,0	14,5	1.000
10371AA0014.0	M 8	14,0	14,5	1.000
10371AA0016.0	M 8	16,0	14,5	1.000

Codigo	A	B	C	Conf./piezas
10371AA0018.0	M 8	18,0	14,5	1.000
10371AA0020.0	M 8	20,0	14,5	1.000
10371AA0022.0	M 8	22,0	14,5	1.000
10371AA0025.0	M 8	25,0	14,5	1.000
10371AA0028.0	M 8	28,0	14,5	1.000
10371AA0030.0	M 8	30,0	14,5	1.000
10371AA0035.0	M 8	35,0	14,5	1.000