

CATENE PORTACAVI



Descrizione tecnica

Materiale: PA 6.6


Colore: Nero

Autoestinguenza: V2 (UL94)

Temperatura d'esercizio: -35°C ~ +85°C

J: Quantità

Tutte le quote sono in mm

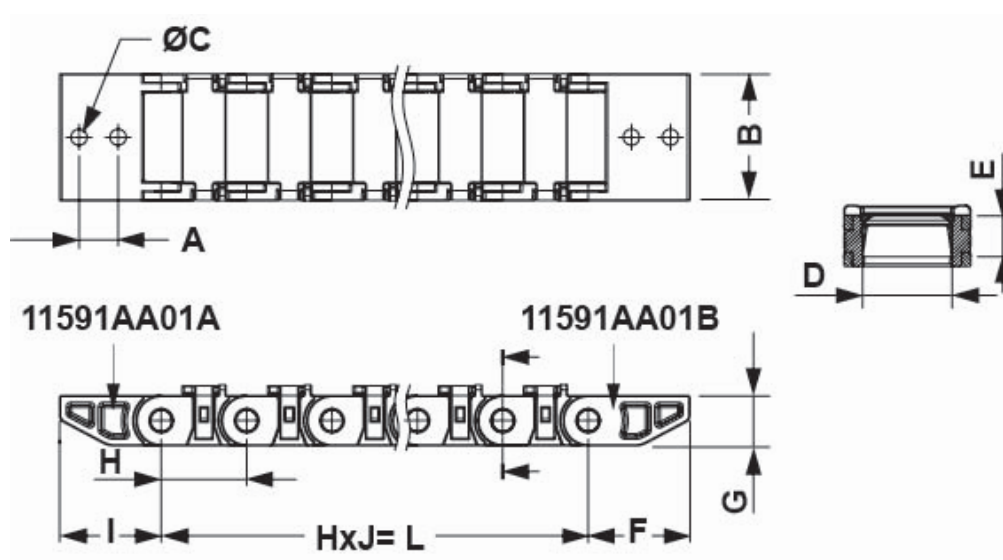

Codice	A	B	C	D	E	F	G	H	I	J	Conf./pezzi
11591AA0105	8,0	26,0	M3	18,4	8,3	20,8	10,3	17,5	20,8	5,0	1.000
11591AA0110	8,0	26,0	M3	18,4	8,3	20,8	10,3	17,5	20,8	10,0	1.000
11591AA0115	8,0	26,0	M3	18,4	8,3	20,8	10,3	17,5	20,8	15,0	1.000
11591AA0120	8,0	26,0	M3	18,4	8,3	20,8	10,3	17,5	20,8	20,0	1.000

Codice	A	B	C	D	E	F	G	H	I	J	Conf./pezzi
11591AA0125	8,0	26,0	M3	18,4	8,3	20,8	10,3	17,5	20,8	25,0	1.000
11591AA0130	8,0	26,0	M3	18,4	8,3	20,8	10,3	17,5	20,8	30,0	1.000
11591AA0135	8,0	26,0	M3	18,4	8,3	20,8	10,3	17,5	20,8	35,0	1.000
11591AA0140	8,0	26,0	M3	18,4	8,3	20,8	10,3	17,5	20,8	40,0	1.000
11591AA0145	8,0	26,0	M3	18,4	8,3	20,8	10,3	17,5	20,8	45,0	1.000
11591AA0150	8,0	26,0	M3	18,4	8,3	20,8	10,3	17,5	20,8	50,0	1.000
11591AA0155	8,0	26,0	M3	18,4	8,3	20,8	10,3	17,5	20,8	55,0	1.000
11591AA0160	8,0	26,0	M3	18,4	8,3	20,8	10,3	17,5	20,8	60,0	1.000
11591AA0165	8,0	26,0	M3	18,4	8,3	20,8	10,3	17,5	20,8	65,0	1.000
11591AA0170	8,0	26,0	M3	18,4	8,3	20,8	10,3	17,5	20,8	70,0	1.000
11591AA01A	8,0	26,0	M3	18,4	8,3	20,8	10,3	17,5	20,8	-	1.000
11591AA01B	8,0	26,0	M3	18,4	8,3	20,8	10,3	17,5	20,8	-	1.000