


DISTANZIATORI F/F M3 ESAGONO 5,5

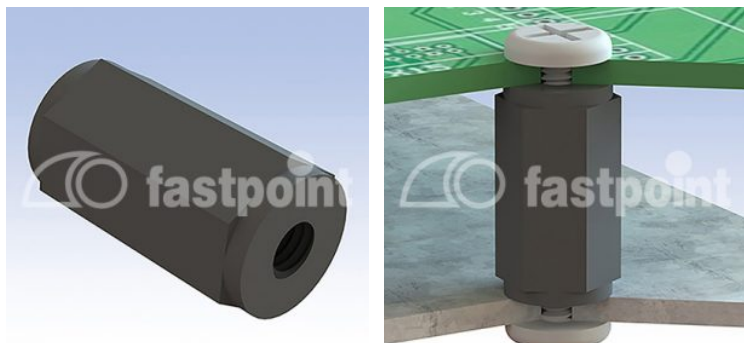

Descrizione tecnica


Materiale: PA 6, 25%GV

Colore: nero


Autoestinguenza: HB (UL 94)

Temperatura esercizio: -30°C ~ +110°C

Tutte le quote sono in mm

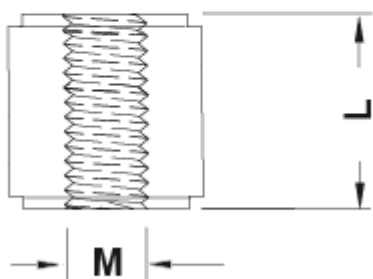

VERSION 1

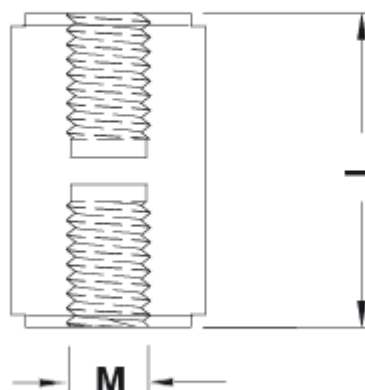

VERSION 2

Codice	L	M	SW	Type	Conf./pezzi
6912BB0105.0	5,0	M3	5,5	1	500
6912BB0106.0	6,0	M3	5,5	1	500
6912BB0107.0	7,0	M3	5,5	1	500
6912BB0108.0	8,0	M3	5,5	1	500
6912BB0109.0	9,0	M3	5,5	1	500
6912BB0110.0	10,0	M3	5,5	1	500
6912BB0111.0	11,0	M3	5,5	1	500
6912BB0112.0	12,0	M3	5,5	1	500
6912BB0113.0	13,0	M3	5,5	1	500
6912BB0114.0	14,0	M3	5,5	1	500
6912BB0115.0	15,0	M3	5,5	1	500
6912BB0116.0	16,0	M3	5,5	2	500
6912BB0117.0	17,0	M3	5,5	2	500
6912BB0118.0	18,0	M3	5,5	2	500
6912BB0119.0	19,0	M3	5,5	2	500
6912BB0120.0	20,0	M3	5,5	2	500
6912BB0121.0	21,0	M3	5,5	2	500
6912BB0122.0	22,0	M3	5,5	2	500
6912BB0123.0	23,0	M3	5,5	2	500
6912BB0124.0	24,0	M3	5,5	2	500
6912BB0125.0	25,0	M3	5,5	2	500
6912BB0126.0	26,0	M3	5,5	2	500
6912BB0127.0	27,0	M3	5,5	2	500
6912BB0128.0	28,0	M3	5,5	2	500
6912BB0129.0	29,0	M3	5,5	2	500
6912BB0130.0	30,0	M3	5,5	2	500
6912BB0131.0	31,0	M3	5,5	2	500
6912BB0132.0	32,0	M3	5,5	2	500
6912BB0133.0	33,0	M3	5,5	2	500
6912BB0134.0	34,0	M3	5,5	2	500
6912BB0135.0	35,0	M3	5,5	2	500

Codice	L	M	SW	Type	Conf./pezzi
6912BB0136.0	36,0	M3	5,5	2	500
6912BB0137.0	37,0	M3	5,5	2	500
6912BB0138.0	38,0	M3	5,5	2	500
6912BB0139.0	39,0	M3	5,5	2	500
6912BB0140.0	40,0	M3	5,5	2	500
6912BB0141.0	41,0	M3	5,5	2	500
6912BB0142.0	42,0	M3	5,5	2	500
6912BB0143.0	43,0	M3	5,5	2	500
6912BB0144.0	44,0	M3	5,5	2	500
6912BB0145.0	45,0	M3	5,5	2	500
6912BB0146.0	46,0	M3	5,5	2	500
6912BB0147.0	47,0	M3	5,5	2	500
6912BB0148.0	48,0	M3	5,5	2	500
6912BB0149.0	49,0	M3	5,5	2	500
6912BB0150.0	50,0	M3	5,5	2	500
6912BB0151.0	51,0	M3	5,5	2	500
6912BB0152.0	52,0	M3	5,5	2	500
6912BB0153.0	53,0	M3	5,5	2	500
6912BB0154.0	54,0	M3	5,5	2	500
6912BB0155.0	55,0	M3	5,5	2	500