

## FASCETTE RIAPRIBILI / RIUTILIZZABILI



### Descrizione tecnica

**Materiale:** Vedi tabella

**Colore:** nero

**Autoestinguenza:**

- PA6.6: V2 (UL94)


- PE-LD: HB (UL94)

**Temperatura d'esercizio:**

- PA 6.6: -35°C ~ +85°C

- PE-LD: -30°C ~ +70°C

Tutte le quote sono in mm.

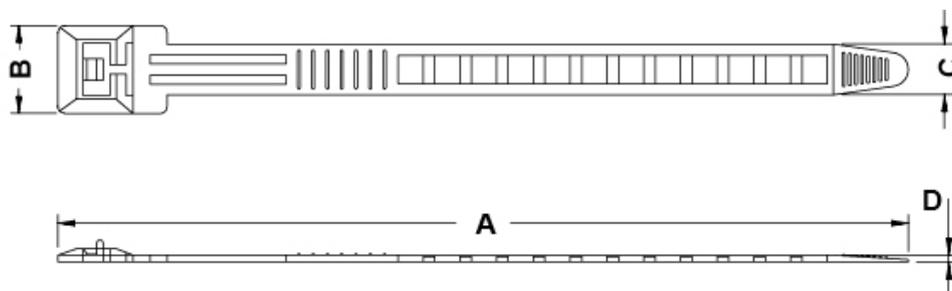

Codice	A	B	C	D	Materiale	Conf./pezzi
10739AA01	125,0	13,0	7,5	1,0	PA 6.6	500
10740EA01	157,0	14,7	8,6	1,5	PE - LD	500
10741AA01	205,0	15,0	8,6	1,7	PA 6.6	500
10742AA01	300,0	15,0	8,6	1,7	PA 6.6	500