


GUIDA DI LUCE PER LED

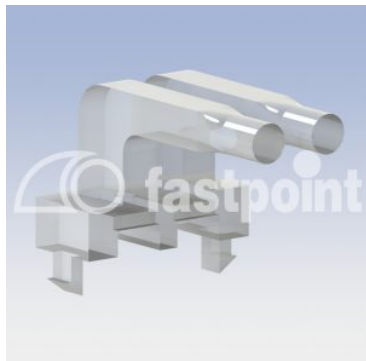

Descrizione tecnica


Materiale: PC

Colore: Chiaro

Autoestinguenza: V2 (UL94)

Temperatura d'esercizio: -40°C ~ +80°C

Tutte le quote sono in mm

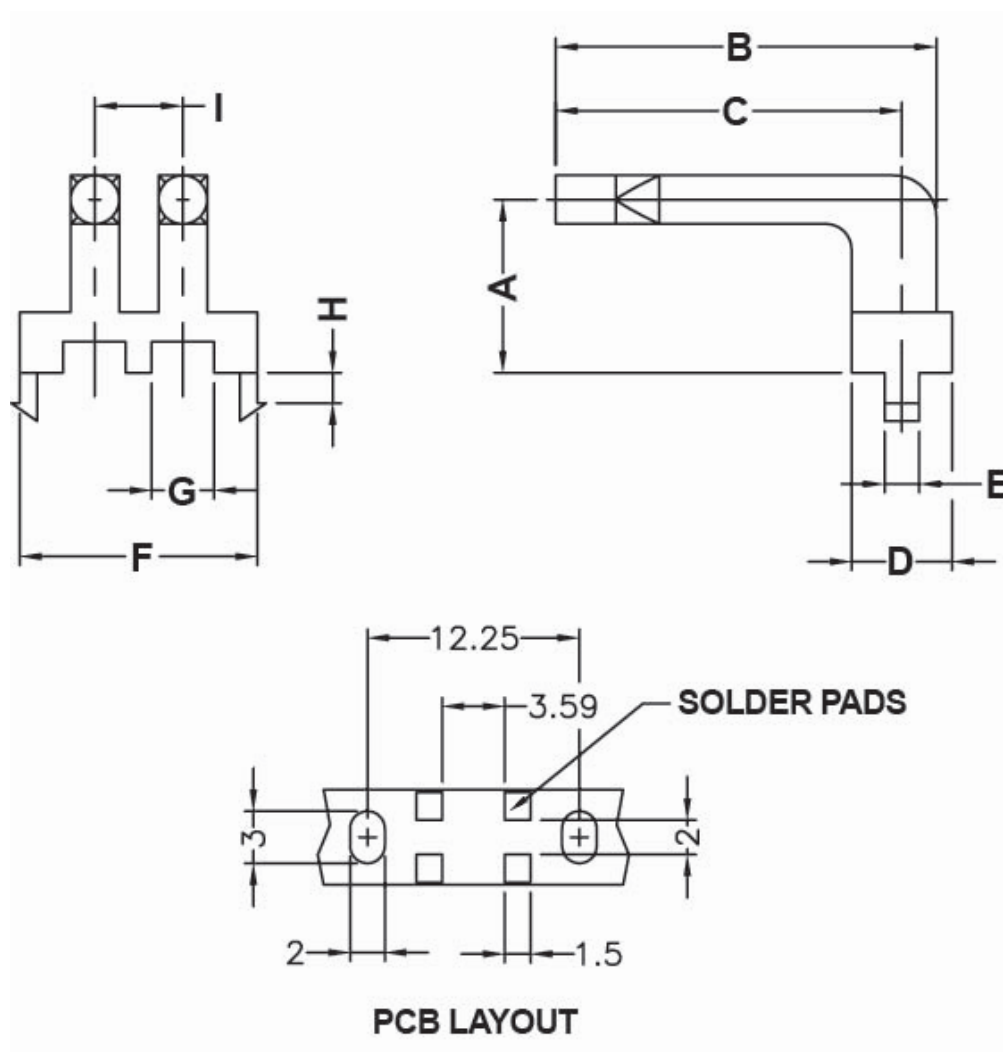

Codice	A	B	C	D	E	F	G	H	I	Conf./pezzi
14060NA00	5,0	16,0	14,0	5,8	2,0	13,7	3,6	1,7	5,0	1.000
14061NA00	5,0	19,0	17,0	5,8	2,0	13,7	3,6	1,7	5,0	1.000
14062NA00	5,0	22,0	20,0	5,8	2,0	13,7	3,6	1,7	5,0	1.000
14063NA00	10,0	16,0	14,0	5,8	2,0	13,7	3,6	1,7	5,0	1.000
14064NA00	10,0	19,0	17,0	5,8	2,0	13,7	3,6	1,7	5,0	1.000
14065NA00	10,0	22,0	20,0	5,8	2,0	13,7	3,6	1,7	5,0	1.000
14066NA00	15,0	16,0	14,0	5,8	2,0	13,7	3,6	1,7	5,0	1.000
14067NA00	15,0	19,0	17,0	5,8	2,0	13,7	3,6	1,7	5,0	1.000
14068NA00	15,0	22,0	20,0	5,8	2,0	13,7	3,6	1,7	5,0	1.000