


PASSACAVI SNAP-FIT IP67 / IP65

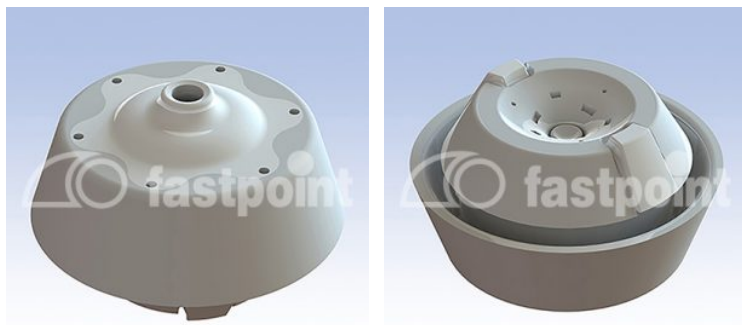

Descrizione tecnica


Materiale: TPE-PA6.6

Colore: Bianco, grigio e nero

Temperatura esercizio: -20°C ~ +125° C

Schutzart= IP67 - IP65 Vedi tabella

Tutte le quote sono in mm.

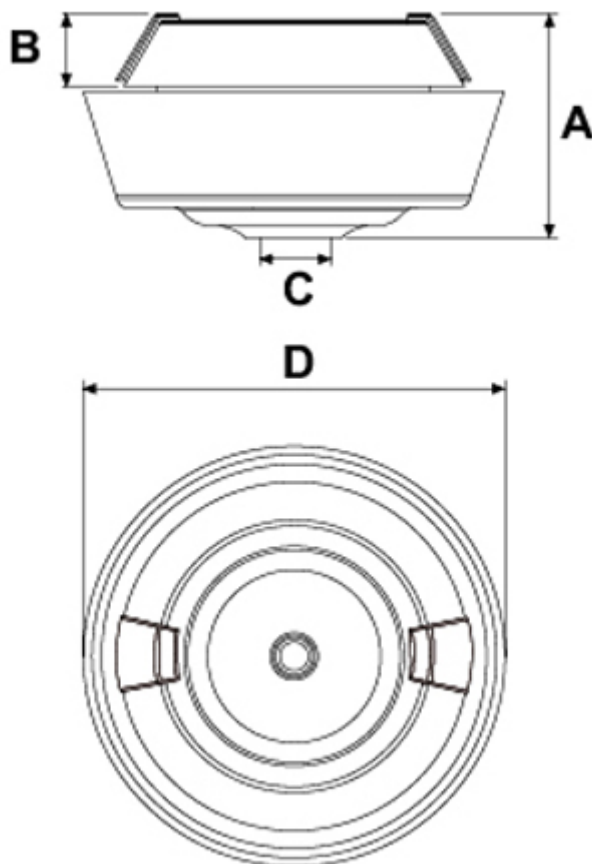

Codice	A	B	C	D	Passo	Foro	Spessore	Colore	Ø Cavo IP67	Ø Cavo IP65	Conf./pezzi
9000PF019005	17 - 20	5,5	4,0	34,2 - 37,2	M20	20,5	0,5 - 3	RAL 9005	Ø 7 - 11	Ø 4 - 11	500
9000PF029010	17 - 20	5,5	4,0	34,2 - 37,2	M20	20,5	0,5 - 3	RAL 9010	Ø 7 - 11	Ø 4 - 11	500
9000PF117035	17 - 20	5,5	4,0	34,2 - 37,2	M20	20,5	0,5 - 3	RAL 7035	Ø 7 - 11	Ø 4 - 11	500
9001PF019005	17 - 20	5,5	4,0	34,2 - 37,2	M25	25,5	0,9 - 3	RAL 9005	Ø 7 - 13	Ø 4 - 13	500
9001PF029010	17 - 20	5,5	5,0	39,2 - 42,2	M25	25,5	0,9 - 3	RAL 9010	Ø 7 - 13	Ø 4 - 13	500
9001PF117035	17 - 20	5,5	5,0	39,2 - 42,2	M25	25,5	0,9 - 3	RAL 7035	Ø 7 - 13	Ø 4 - 13	500
9002PF019005	17 - 20	5,5	5,0	39,2 - 42,2	M20	20,5	2 - 5	RAL 9005	Ø 7 - 11	Ø 4 - 11	500
9002PF029010	17 - 20	5,5	4,0	29,3 - 34,5	M20	20,5	2 - 5	RAL 9010	Ø 7 - 11	Ø 4 - 11	500
9002PF117035	17 - 20	5,5	4,0	29,3 - 34,5	M20	20,5	2 - 5	RAL 7035	Ø 7 - 11	Ø 4 - 11	500
9003PF019005	17 - 20	5,5	4,0	29,3 - 34,5	M25	25,5	2 - 5	RAL 9005	Ø 7 - 13	Ø 4 - 13	500
9003PF029010	17 - 20	5,5	5,0	34,3 - 40,0	M25	25,5	2 - 5	RAL 9010	Ø 7 - 13	Ø 4 - 13	500
9003PF117035	17 - 20	5,5	5,0	34,3 - 40,0	M25	25,5	2 - 5	RAL 7035	Ø 7 - 13	Ø 4 - 13	500