

PASSACAVI MORBIDI CON MEMBRANA Ø6,0 – 88,0



Descrizione tecnica

Materiale: Vedi tabella

Colore: Nero

Autoestinguenza:

- PVC: HB (UL94)

- TPE: HB (UL94)


Temperatura d'esercizio:

- PVC: -25°C ~ +60°C

- TPE: -28°C ~ +90°C

Tutte le quote sono in mm

Fornibile anche in TPE su richiesta speciale.

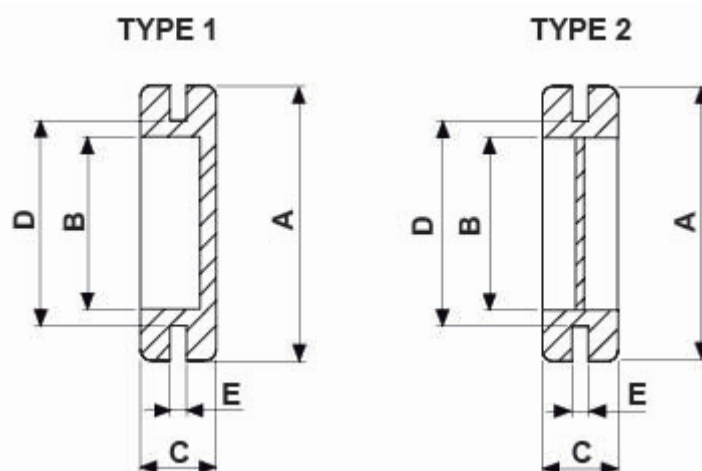

| Codice | A | B | C | D | E | Type | Materiale | Conf./pezzi |
|------------|------|------|------|------|-----|------|-----------|-------------|
| 4575CA01M | 10,0 | 3,0 | 6,0 | 6,0 | 2,0 | 1 | PVC | 1.000 |
| 4586CA01M | 12,0 | 6,0 | 7,0 | 8,0 | 3,0 | 1 | PVC | 1.000 |
| 0874CA01M | 14,0 | 6,0 | 6,0 | 8,0 | 1,0 | 1 | PVC | 1.000 |
| 1247CA01M | 14,0 | 6,0 | 7,0 | 8,5 | 2,5 | 1 | PVC | 1.000 |
| 0849CA01M | 14,5 | 8,0 | 6,0 | 10,0 | 1,5 | 1 | PVC | 1.000 |
| 0864CA01M | 16,0 | 7,0 | 7,0 | 10,0 | 1,5 | 2 | PVC | 1.000 |
| 0828CA01M | 16,0 | 8,0 | 6,0 | 11,0 | 0,5 | 1 | PVC | 1.000 |
| 0880CA01M | | | | | | | | |
| 14862CA01M | | | | | | | | |
| 0836CA01M | 20,5 | 10,0 | 7,0 | 15,0 | 2,0 | 1 | PVC | 1.000 |
| 0842CA01M | 20,5 | 13,0 | 7,0 | 15,0 | 2,0 | 1 | PVC | 1.000 |
| 0834CA01M | 20,5 | 9,0 | 7,0 | 15,0 | 2,0 | 1 | PVC | 1.000 |
| 5853PF01M | 20,0 | 9,0 | 7,0 | 15,5 | 2,0 | 2 | TPE | 1.000 |
| 2410CA01M | 22,0 | 11,0 | 8,0 | 17,5 | 2,0 | 1 | PVC | 1.000 |
| 0869CA01M | 24,0 | 11,0 | 7,5 | 18,0 | 2,0 | 1 | PVC | 1.000 |
| 5854PF01M | 23,0 | 11,0 | 7,0 | 18,5 | 2,0 | 2 | TPE | 1.000 |
| 14877PD01M | | | | | | | | |
| 5855PF01M | 25,0 | 13,5 | 7,0 | 20,5 | 2,0 | 2 | TPE | 1.000 |
| 0865CA01M | 28,0 | 15,0 | 8,0 | 21,0 | 2,0 | 2 | PVC | 1.000 |
| 14882PS01M | | | | | | | | |
| 5856PF01M | 27,5 | 16,0 | 7,0 | 22,5 | 2,0 | 2 | TPE | 1.000 |
| 4677CA01M | 28,0 | 19,0 | 8,0 | 23,0 | 2,0 | 1 | PVC | 1.000 |
| 1258CA01M | 32,0 | 19,0 | 8,5 | 24,0 | 2,0 | 1 | PVC | 1.000 |
| 1257CA01M | 35,0 | 21,0 | 8,5 | 26,0 | 2,0 | 1 | PVC | 1.000 |
| 5857PF01M | 35,0 | 21,0 | 8,0 | 28,0 | 2,0 | 2 | TPE | 1.000 |
| 5742CA01M | 35,0 | 21,0 | 8,5 | 28,0 | 2,0 | 1 | PVC | 1.000 |
| 4498CA01M | 39,0 | 28,0 | 7,0 | 34,0 | 2,0 | 1 | PVC | 500 |
| 5858PF01M | 44,0 | 29,0 | 8,0 | 37,0 | 2,0 | 2 | TPE | 1.000 |
| 14978CA01M | | | | | | | | |
| 15901PS01 | 47,0 | 31,0 | 10,0 | 42,0 | 2,4 | TPE | 500 | |
| 5624CA01M | 54,0 | 36,0 | 10,0 | 46,0 | 2,5 | 200 | | |

| Codice | A | B | C | D | E | Type | Materiale | Conf./pezzi |
|------------|-------|------|------|------|-----|------|-----------|-------------|
| 4379CA01M | 52,0 | 34,5 | 13,5 | 46,5 | 2,0 | 2 | PVC | 1.000 |
| 5859PF01M | 54,0 | 36,0 | 9,0 | 47,0 | 2,5 | 2 | TPE | 500 |
| 5876PF01M | 68,0 | 47,0 | 9,0 | 59,0 | 2,5 | 2 | TPE | 250 |
| 5877PF01M | 75,0 | 53,0 | 10,0 | 64,0 | 2,5 | 2 | TPE | 250 |
| 18287CA01 | 72,0 | 58,0 | 9,5 | 64,0 | 2,5 | 2 | PVC | |
| 12419CA01M | 90,0 | 70,0 | 9,3 | 77,0 | 2,0 | 2 | PVC | 1.000 |
| 12420CA01M | 100,0 | 80,0 | 10,3 | 88,0 | 1,5 | 2 | PVC | 100 |