

TAPPI FILETTATI PASSO METRICO IP 54



Descrizione tecnica

Materiale: PA 6


Colore: vedi tabella

Autoestinguenza: V2 (UL94)

Temperatura d'esercizio: -30°C ~ +100°C

Metrico secondo EN 60423

Tutte le quote sono in mm

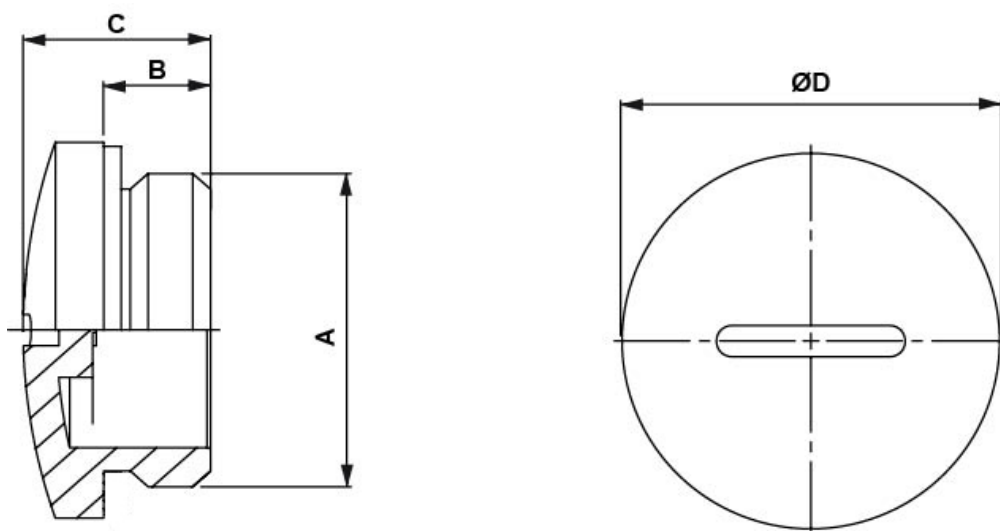

Codice	A	B	C	D	Colore	Conf./pezzi
24048AA019005	M12 x 1,5	6,0	8,5	15,0	RAL 9005	100
24048AA117001	M12 x 1,5	6,0	8,5	15,0	RAL 7001	100
24048AA117035	M12 x 1,5	6,0	8,5	15,0	RAL 7035	100

Codice	A	B	C	D	Colore	Conf./pezzi
24049AA019005	M16 x 1,5	7,0	10,0	20,0	RAL 9005	100
24049AA117001	M16 x 1,5	7,0	10,0	20,0	RAL 7001	100
24049AA117035	M16 x 1,5	7,0	10,0	20,0	RAL 7035	100
24050AA019005	M20 x 1,5	7,0	10,0	24,0	RAL 9005	100
24050AA117001	M20 x 1,5	7,0	10,0	24,0	RAL 7001	100
24050AA117035	M20 x 1,5	7,0	10,0	24,0	RAL 7035	100
24051AA019005	M25 x 1,5	10,0	14,0	30,0	RAL 9005	100
24051AA117001	M25 x 1,5	10,0	14,0	30,0	RAL 7001	100
24051AA117035	M25 x 1,5	10,0	14,0	30,0	RAL 7035	100
24052AA019005	M32 x 1,5	10,0	14,0	37,0	RAL 9005	100
24052AA117001	M32 x 1,5	10,0	14,0	37,0	RAL 7001	100
24052AA117035	M32 x 1,5	10,0	14,0	37,0	RAL 7035	100
24053AA019005	M40 x 1,5	10,0	15,0	48,0	RAL 9005	50
24053AA117001	M40 x 1,5	10,0	15,0	48,0	RAL 7001	50
24053AA117035	M40 x 1,5	10,0	15,0	48,0	RAL 7035	50