

DIM.	TOL.
5mm DOWN	±0.2
5∼20mm	±0.3
20~40mm	±0.4
40∼60mm	±0.5
60 ~ 100mm	±0.8
100mm LIP	+10



REVISIONS					
REV	DESCRIPTION	DATE	BY		

SECTION Y-Y

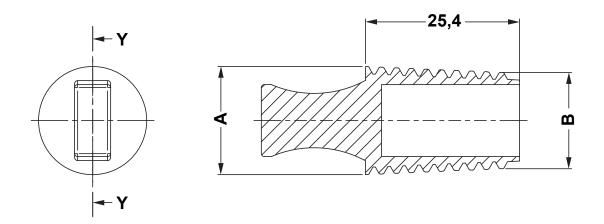

P/N	Α	В
25098SI00	6,0	4,0
25099SI00	8,0	6,0
25100SI00	10,0	8,0
25101SI00	12,0	10,0
25102SI00	14,0	12,0
25103SI00	16,0	14,0
25104SI00	18,0	16,0

P/N	Α	В
25105SI00	20,0	18,0
25106SI00	22,5	20,0
25107SI00	24,0	22,5
25108SI00	26,0	24,0
25109SI00	28,0	26,0
25110SI00	28,6	25,4
25111SI00	31,8	28,6

NOTES:

DRAWING NUMBER

mm.

For high temperatures: resistant up to 315 ° C



PART NUMBER

SEE TABLE

NTS

TITLE HIGH TEMPERATURE FLANGELESS PLUGS MATERIAL DATE 16/05/2018 SILICONE RUBBER DRAWN R.F. COLOUR CHECK **NATURAL** 18.05.16.25XXX.0.E UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE APPROVED