


DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

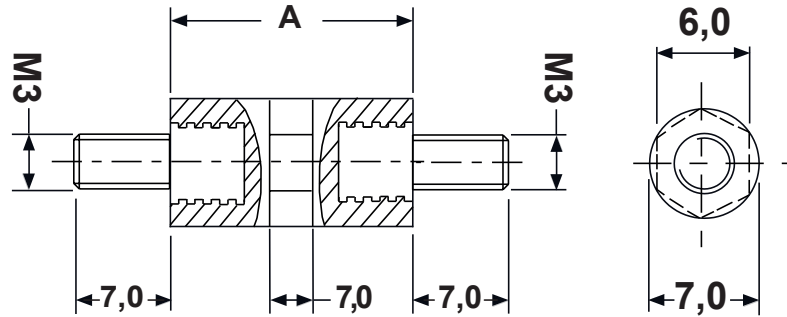

P/N	A
10482DA1115.0	15.0
10482DA1120.0	20.0
10482DA1125.0	25.0
10482DA1130.0	30.0
10482DA1140.0	40.0

**NOTES:**

**MATERIAL: POLYSTYROL**


**THREAD INSERT: STEEL ZINC PLATED**

**COLOUR: GREY**

**UL FLAMMABILITY: HB (UL 94)**

**WORKING TEMPERATURE: -15°C ~ + 90°C**

**DIELECTRIC STRENGTH: 50KV**

				TITLE <b>INSULATING POLYSTYROL AND STEEL P.C.B. SPACERS</b>	
				MATERIAL SEE ABOVE	
PART NUMBER SEE TABLE				DRAWING NUMBER 21.07.30.10482.0.E	
				COLOR SEE ABOVE	
SIZE A4	SCALE NTS	UNIT mm.	REV A	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	
				APPROVED	