


DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

P/N	A	B	C	MAX. BUNDLE Ø	TENSILE STRENGTH N
18179AA01	92,0	2,3	1,0	1,5-22,0	80
18180AA01	203,0	2,3	1,0	1,5-51,0	80
18181AA01	356,0	2,3	1,0	1,5-102,0	80
18182AA01	140,0	3,6	1,1	2,0-35,0	180
18183AA01	208,0	3,6	1,1	2,0-51,0	180
18184AA01	284,0	3,6	1,1	2,0-76,0	130
18185AA01	368,0	3,6	1,1	2,0-102,0	130
18186AA01	186,0	4,8	1,1	3,0-48,0	220
18187AA01	290,0	4,8	1,3	3,0-78,0	220
18188AA01	361,0	4,8	1,3	3,0-102,0	220
18189AA01	223,0	6,9	1,6	6,0-51,0	540
18190AA01	340,0	7,0	1,6	6,0-102,0	540
18191AA01	457,0	7,0	1,6	6,0-127,0	540
18192AA01	617,0	7,0	1,6	6,0-177,0	540
18193AA01	771,0	6,9	1,5	6,0-229,0	540
18194AA01	150,0	7,6	1,6	6,0-31,0	540
18195AA01	889,0	8,2	1,7	to 254,0	780
18196AA01	1143,0	8,2	1,7	to 330,0	780

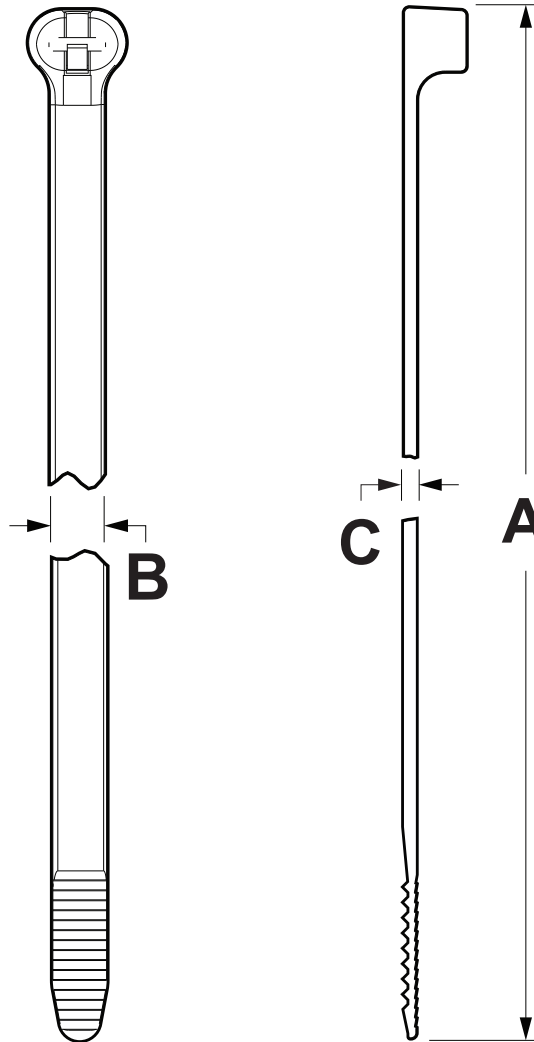

**NOTES:**

UV RESISTANT  
 HALOGEN AND SILICON FREE  
 WORKING TEMPERATURE -60° ...+105°C

**MATERIAL:**  
 BODY PA 6.6 V2(UL94)  
 BARB 316 STAINLESS STEEL

REV.	DESCRIPTION	DATE	TITLE: CABLE TIES	DWG UNIT: MM
	MATERIAL: SEE ABOVE		Modelled in RHINO 4.0	FILE: DwN: 22.07.21.181X.E.0
	COLOUR: BLACK		TOLLERANCES UNLESS NOTED	ChkD: DT: 21/07/22
			SEE ABOVE	Part Number: SEE TABLE
			SCALE: NTS	

