DIM.	TOL.
5mm DOWN	±0.2
5～20mm	±0.3
20～40mm	±0.4
40～60mm	±0.5
60～100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

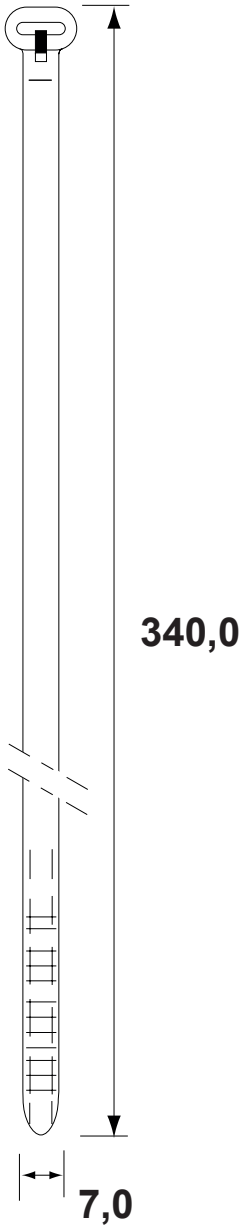

UV RESISTANT

NOTES:

UV RESISTANT
HALOGEN AND SILICON FREE

THICKNESS: 1,3

MAXIMUM BUNDLE DIAMETER: 90,0
TENSILE STRENGTH 270 N

WORKING TEMPERATURE -40° ...+85°C

MATERIAL:
BODY PP HB(UL94)
BARB 316 STAINLESS STEEL

	DESCRIPTION	
	MATERIAL: SEE ABOVE	
	COLOUR: BLACK	
REV.		DATE

TITLE: **RELEASABLE CABLE TIES**			DWG UNIT: MM
Modelled in RHINO 4.0	FILE:	DwN: 23.05.16.18375	ChkD:
TOLLERANCES UNLESS NOTED	SHEET: 1 OF 1	DT: 16/05/23	Part Number: 18375FA01
SEE ABOVE	SCALE: **NTS**	fastpoint	