


DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

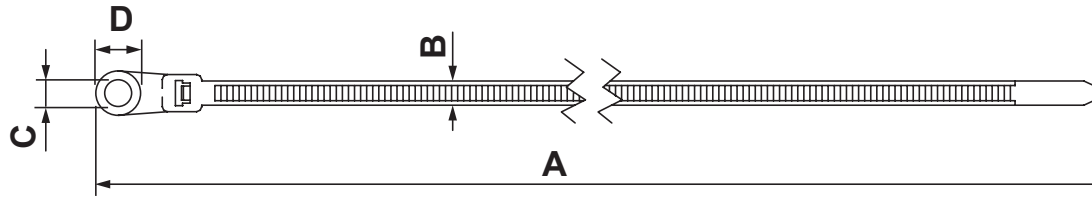

P/N	A	B	C	D	Max. cable diameter	Min. loop tensile strenght (Kg)
4771AA00	110,0	2,5	3,2	6,2	22,0	8,1
2436AA00	150,0	3,6	4,8	8,0	32,0	18,2
2437AA00	200,0	4,8	5,5	9,6	50,0	22,2
4772AA00	310,0	4,8	5,5	9,8	76,0	22,2
2438AA00	215,0	7,6	5,7	11,5	50,0	54,4
2439AA00	375,0	7,6	6,3	11,5	98,0	54,4

REV.	DESCRIPTION	DATE	TITLE: SCREW MOUNTING CABLE TIES	DWG UNIT: MM
	MATERIAL: PA 6.6 V2(UL94)		Modelled in RHINO 4.0	
	COLOUR: NATURAL		FILE:	DwN: 05/05/21
	WORKING TEMPERATURE: -35°C ~ +85°C		TOLLERANCES UNLESS NOTED	ChkD: DT: 21.05.05.XXXX.0. Part Number: SEE TABLE
			SEE ABOVE	
			SHEET: 1 OF 1	
			SCALE: NTS	

